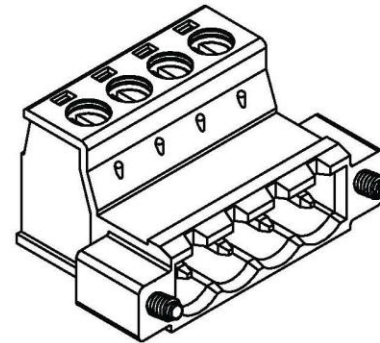
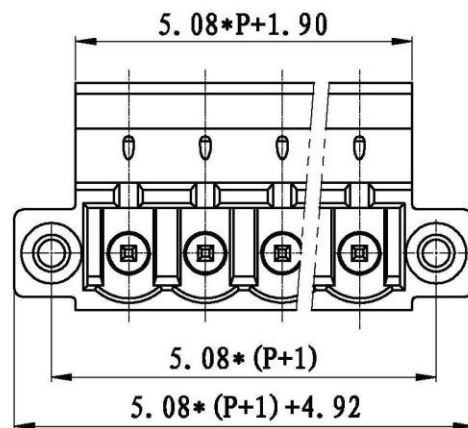
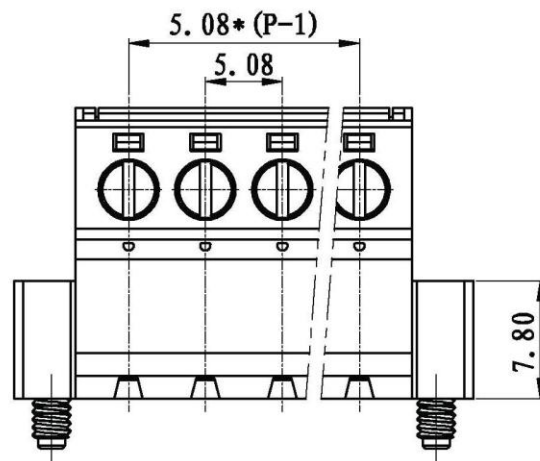


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 5M Ohm or more at DC500V
5. Using Temperature Range: -40° C ~ +105° C
6. Suitable Electric Wire: 24-12AWG
7. Screw Torque Value: 0.5-0.6Nm

技术要求:

- 1.额定电压: 300V, 额定电流: 15A
- 2.间距: 5.08mm
- 3.耐电压值: AC 2500V/min
- 4.绝缘电阻≥5兆欧
- 5.使用条件: -40° ~ +105°
- 6.适用线规: 24-12AWG
- 7.螺栓扭力: 0.5N.m

	pitch dimension			Nominal dimension					— □ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0	6	10	0	30	60	100	150	□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6.	LC1-系列-耳朵螺丝	SP0YA255101V	2	碳钢	三价铬钝化彩锌		
5.	LC10-5.08-焊脚	1011B0001AV	P	紫铜	镀锡		
4.	LC1-5.08-螺丝	SP0YB305303V	P	碳钢	三价铬钝化彩锌		
3.	LC1-5.08-铜方块	FLA0BLCS003V	P	黄铜	镀镍		
2.	LC1-5.08-盖板	1001COYXXAV	1	PA66-V0			
1.	LC10M-5.08-本体	1011MOYXXAV	1	PA66-V0			
NO.	NAME OF PART		NO. OF PART	Q' TY	MATERIAL	NOTES	
DES.	ARKINE	DATE	2011/02/22	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO. SP-2-1011002	REV: V0
 上海联捷电气有限公司 Shanghai Bliker Electric C.O., LTD						TITLE	LC10M-5.08-XXP-1Y-00A
							LC10M-5.08-成品