
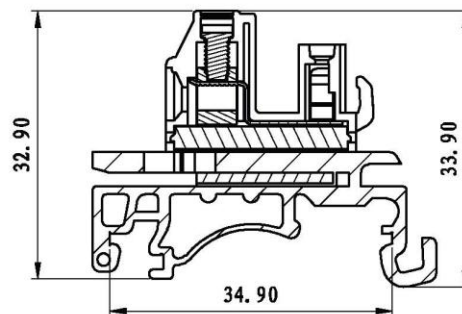
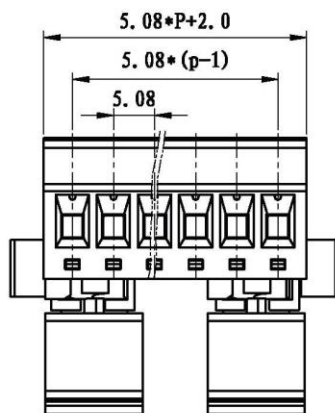


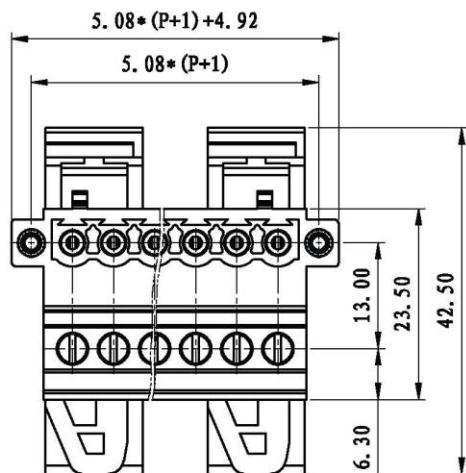

备注：2-4线只使用1个脚并且位产品正中间，5-24线使用2个脚

	pitch dimension			Nominal dimension					
variable	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	○

REVISION RECORD

REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:

Pitch: 5.08mm Pole: 2-24P
Rated Voltage: 300V
Rated Current: 15A
Withstand Voltage:
AC2500V for 1 minute
Insulation Resistance :
5MΩ/DC500V
Using Temperature Range : -40° - +150°
Wire range : 24-12 AWG
Screw Torque Value : 0.5N.m

技术要求:

间距: 5.08mm 板数: 2-24P
额定电压: 300V
额定电流: 15A
耐电压值: AC 2500V/min
绝缘阻抗: 5MΩ
使用条件: -40℃ - +105℃
适用线规: 24-12AWG
螺丝扭矩: 0.5 N.m

7	耳朵螺母	SNM0250010V	2	碳钢	三价铬钝化彩锌
6	LC17-5.08夹子	1046B0001AV	XXP	磷青铜	镀镍
5	LC1-5.08-方块	F1A0BLC5083V	XXP	黄铜	镀镍
4	LC1-5.08-螺丝	SP0YA3053011	XXP	碳钢	三价铬钝化彩锌
3	LC16脚	1045A0YXXAV	1-2	PA66-V0	
2	LC17U-5.08盖板	1044C0YXXAV	1	PA66-V0	
1	LC17UM-5.08主体	1044M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE	2012/05/19	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-1044001	REV: V0
TITLE				LC17UM-5.08成品	

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE

LC17UM-5.08-XXP-1Y-00A
LC17UM-5.08成品