
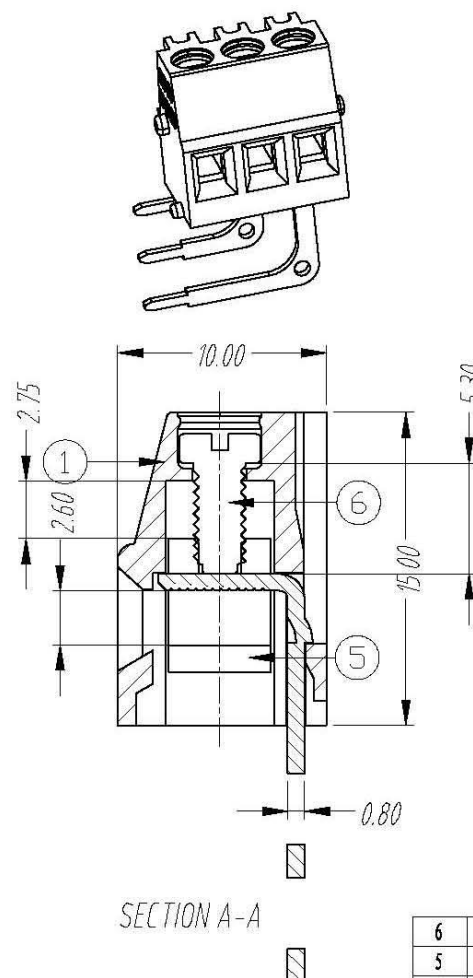


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	新发行		

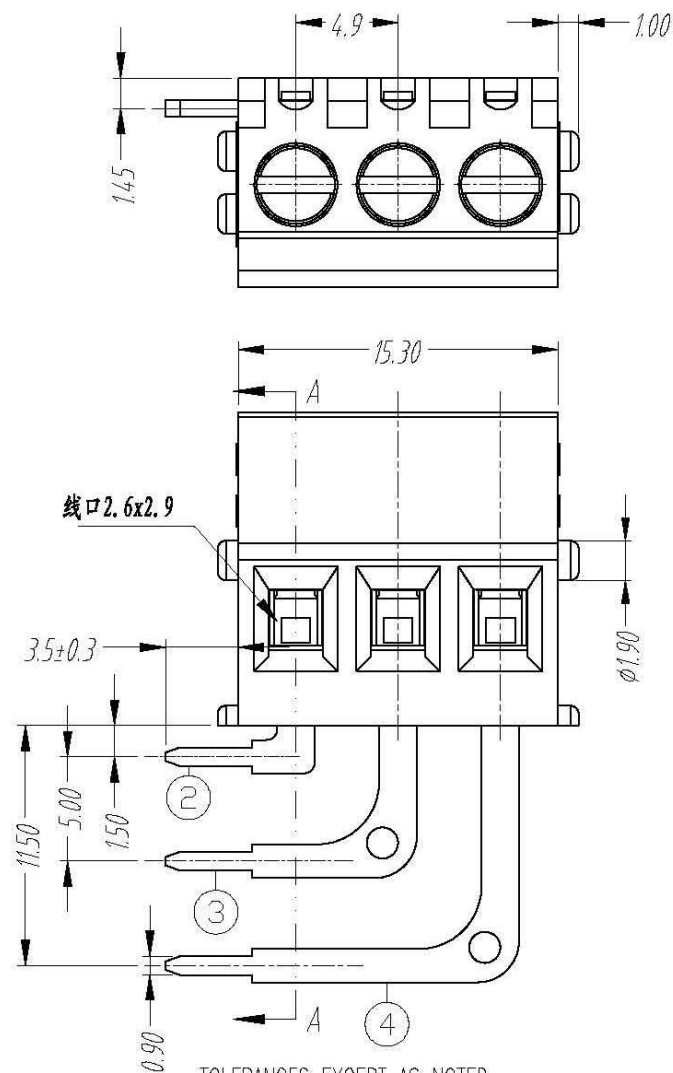

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC3000V/min
4. Insulation Resistance: 1000MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 26-12AWG
7. Screw Torque Value: 0.8Nm

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.0mm
3. 耐电压值: AC 3000V/min
4. 绝缘阻抗1000兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 26-12AWG
7. 螺丝扭力: 0.8Nm

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle	sid	≡	—	□	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	to 6	to 10	to 10	to 10	to 10	to 10	to 10	to 10
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3

NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
6	LC1-系列-耳朵螺丝	SSD0250010V	1	碳钢	三价铬钝化彩锌
5	LG128-铜方块	F000000110V	1	黄铜	镀镍
4	LGV3A-5.0-大焊脚	2030B00030V	1	黄铜	镀锡
3	LGV3A-5.0-中焊脚	2030B00020V	1	黄铜	镀锡
2	LGV3A-5.0-小焊脚	2030B00010V	1	黄铜	镀锡
1	LGV3-5.0-本体	2030A1001AV	1	PA66	UL94V-0
DES.	ARKINE	DATE	2011/7/8	UNITS	MM
CHK.	DATE	SIZE	A4	THIRD ANGLE PROJECTION	SHEET
APP.	DATE	SCALE	2:1	DWG NO.	SP-1-2030001
上海联捷电气有限公司				TITLE	LGV3A-5.0-01P-110-00A
Shanghai Elinker Electric C.O,LTD					LGV3A-5.0