


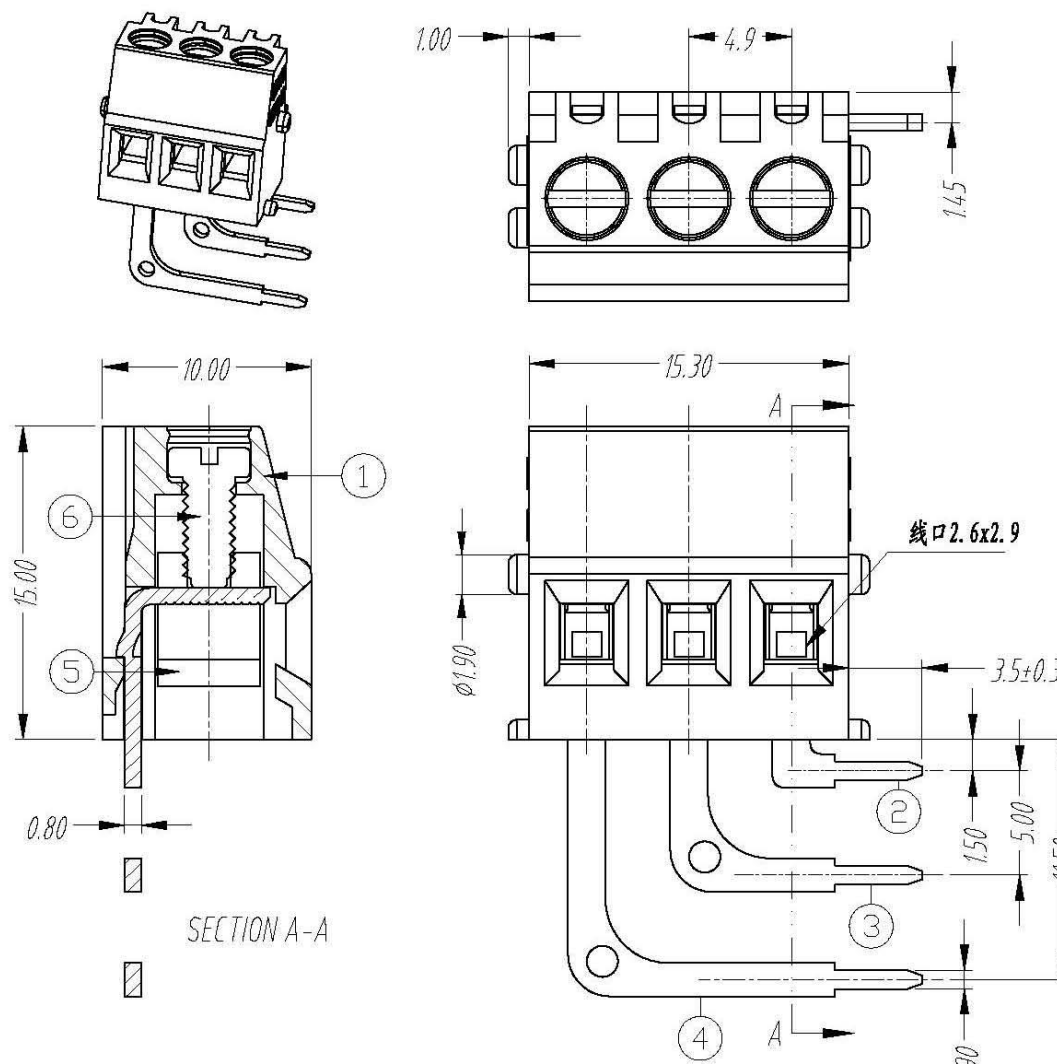

SECTION A-A

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		 short angle side								
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	to 480	all	to 6	over 6 to 10	to 10 to 50	over 50 to 120	to 120	all	to 5 to 30	over 30 to 120	to 120 to 480		
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3	0.025	0.06	0.12	0.4


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	新发行		

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC3000V/min
4. Insulation Resistance: 1000MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 26-12AWG
7. Screw Torque Value: 5.10 kgf.cm

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.0mm
3. 耐电压值: AC 3000V/min
4. 绝缘阻抗1000兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 26-12AWG
7. 螺丝扭力: 5.08kgf.cm

6	LC1-系列-耳朵螺丝	SSD0250010V	1	碳钢	三价铬钝化彩锌		
5	LG128-铜方块	F000000110V	1	黄铜	镀镍		
4	LGV3B-5.0-大焊脚	2030B00050V	1	黄铜	镀锡		
3	LGV3B-5.0-中焊脚	2030B00040V	1	黄铜	镀锡		
2	LGV3B-5.0-小焊脚	2030B00030V	1	黄铜	镀锡		
1	LGV3-5.0-本体	2030A1001AV	1	PA66	UL94V-0		
NO.	NAME OF PART		NO. OF PART	Q' TY	MATERIAL	NOTES	
DES.	ARKINE	DATE	2011/7/8	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	2:1	DWG NO.	SP-1-2030002
 上海联捷电气有限公司 Shanghai Elinker Electric Co.,LTD						TITLE	
						LGV3B-5.0-01P-110-00	
						LGV3B-5.0	