

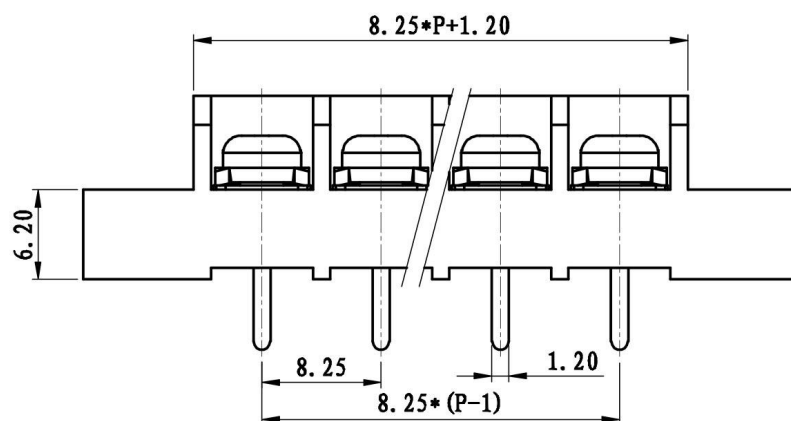


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
	初版发行		

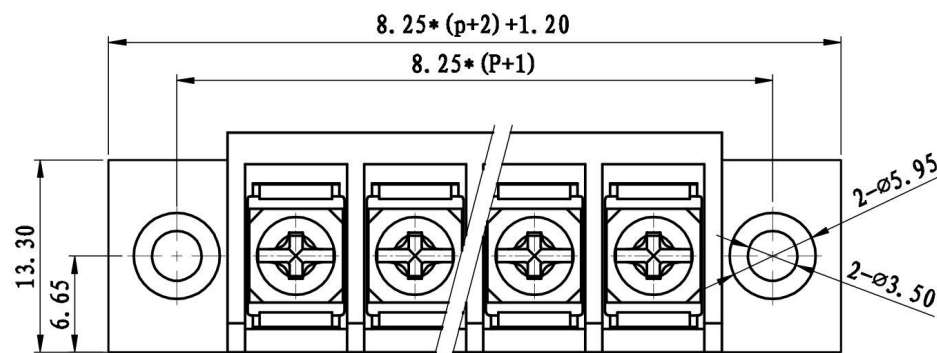

NOTES:
Pitch : 8.25mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500M Ω / DC500V
Using Temperature Range :
-40 $^{\circ}$ C ~ +130 $^{\circ}$ C
Wire range : 22-12 AWG
Screw Torque Value : M3/0.5Nm

技术要求:
间距: 8.25mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 500M Ω /DC500V
使用条件: -40 $^{\circ}$ C~+130 $^{\circ}$ C
适用线规: 22-12 AWG
螺丝扭矩: M3/0.5Nm

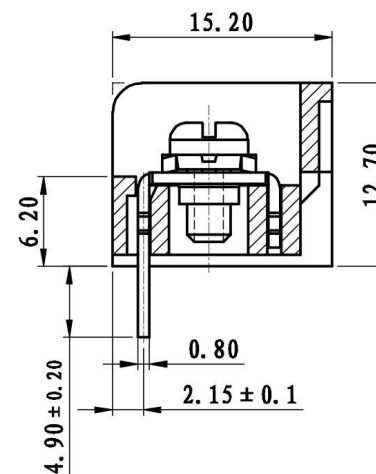

	pitch dimension			Nominal dimension					—
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

3.	M3*6 (6.5*6.5)		SQFFA306033V		P	碳钢	镀锌
2.	LW3B-8.25-焊脚		5001B0001AV		P	黄铜	镀雾锡
1.	LW3M-8.25-本体		5001M0YXXAV		1	PBT	
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/5/8	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.		DATE		SIZE	A4		SHEET 1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-5001002 REV: V0
 上海联捷电气有限公司 Shanghai Blinker Electric C.O., LTD						TITLE	
						LW3MA-8.25-XXP-1Y-00A LW3MA-8.25-成品	