


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
A	初版发行		

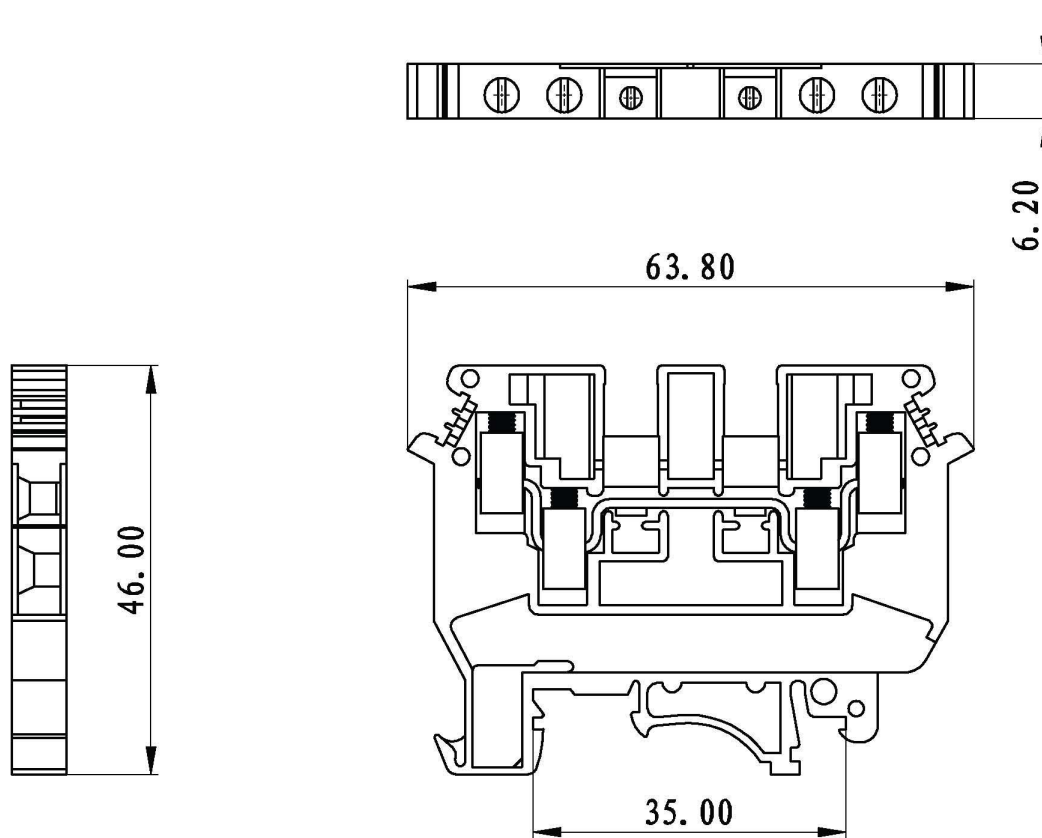

技术要求:
 极数: 组装
 额定电压: 690V
 额定电流: 32A
 螺钉类型/扭力: M3/0.6-0.8
 绝缘材料类型: PA
 阻燃等级: V0
 导线截面: 4mm²

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	∠ short angle sid				≡	—	□	//	⊥	
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

4	UDX4-方块	6065B10002V	2	黄铜	镀镍
3	UDX4-螺丝	SSM0300130V	2	碳钢	镀锌
2	UDX4-导电件	6065B10001V	1	PA	灰色
1	UDX4-本体	6065A1001AV	1	PA	灰色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/09/17	UNITS	mm
CHK.	DATE	SIZE	A4	THIRD ANGLE PROJECTION	SHEET
APP.	DATE	SCALE	1:1	DWG NO.	1 of 1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	UDX4-110-00A
					UDX4-产品