

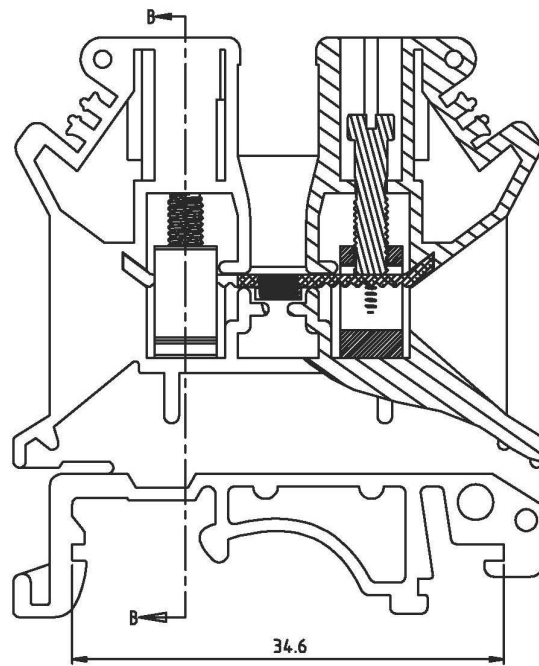


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①			

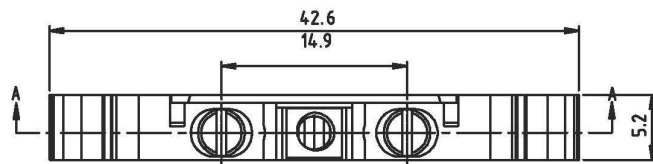

SECTION A-A

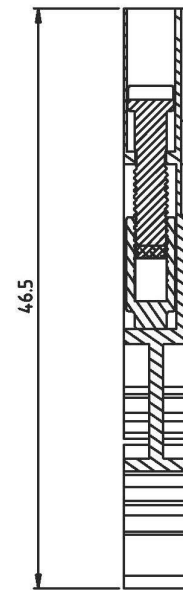

SECTION B-B

电气性能

电压

800V

电流

32A

刚/柔性导线

0.2-4/0.2-2.5mm²

线规AWG

24-12

螺钉类型/扭力

M3/0.5-0.6Nm

绝缘材料类型

PA66

阻燃级别

V0

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle side				≡	—	□	//	⊥
	over 6	over 30	over 120	over 480		over 6	over 10	over 50	over 120			over 5	over 30	over 120	
variable range	to 6	to 30	to 120	to 480	all	to 6	to 10	to 50	to 120	all	to 5	to 30	to 120	to	
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1'	30'	20'	10'	0.3	0.025	0.06	0.4

NO.	NAME OF PART	NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.	DATE	10/04/05	UNITS	MM	THIRD ANGLE PROJECTION	SHEET	
CHK.	DATE		SIZE	A4	⊕	of	
APP.	DATE		SCALE	1:1	DWG NO.		
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD					TITLE	UK3N	