




REVISION RECORD			
REV.	CONTENT	MOD.	DATE
▲	初版发行		



技术要求:
 极数: 组装
 额定电压: 1000V
 额定电流: 150A
 螺钉类型/扭力: M6/3-6
 绝缘材料类型: PC
 阻燃等级: V1
 导线截面: 刚性导线0.75-50mm²
 柔性导线0.75-35mm²

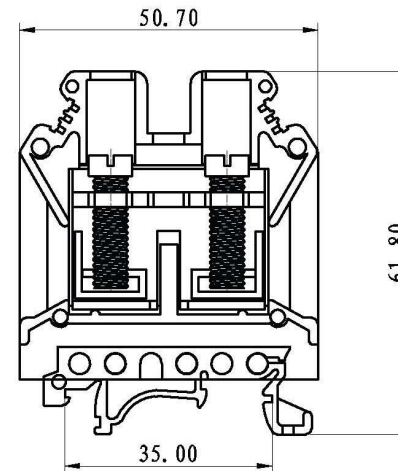

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet		chamfer		short angle sid			≡	—	□	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

4	UK35N-螺丝	SSD0600050V	2	碳钢	镀锌
3	UK35N-导电件	6053B00010V	1	黄铜	镀镍
2	UK35N-脚	6053C1001AV	1	PC	灰色
1	UK35N-本体	6053A1001AV	2	PC	灰色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/09/17	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	UK35N-110-00A
					UK35N-产品