
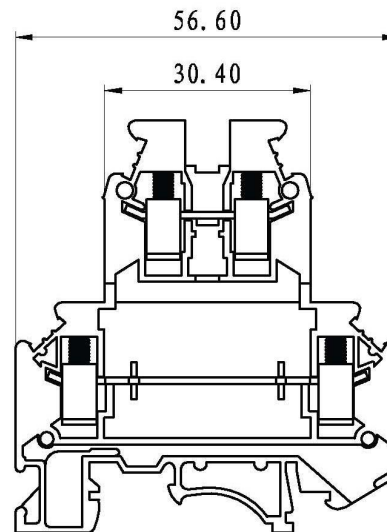
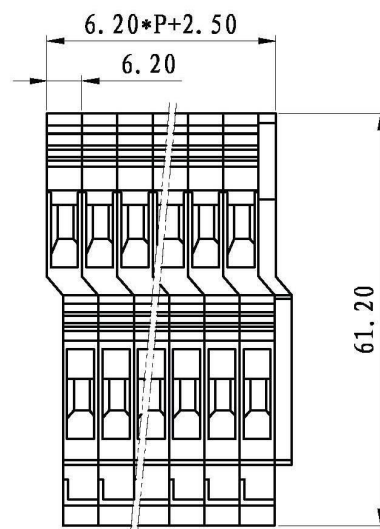


REVISION RECORD			
REV.	CONTENT	MOD.	DATE

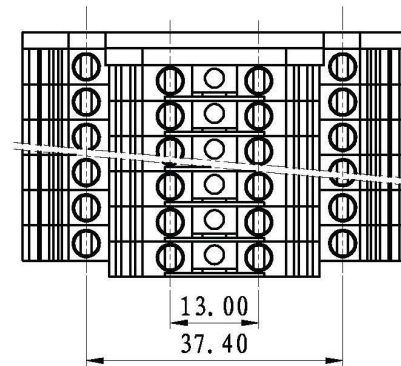

电气性能	
电压	500V
电流	32A
刚/柔性导线线	0.2-4mm ²
线规AWG	24-12
螺钉类型/扭力	M3/0.6-0.8Nm
绝缘材料类型	PA
阻燃级别	V0

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		 short angle sid								
variable range		over 6	over 30	over 120	over 480			over 6		over 10	over 50	over 120			over 5	over 30	over 120
	to 6	to 30	to 120	to 480		all	to 6	to	to 10	to 50	to 120	to	all	to 5	to 30	to 120	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

6	UKK5-方块	6057B00030V	4P	黄铜	镀镍
5	UKK5-螺丝	SSM0300170V	4P	碳钢	镀镍
4	UKK5-长导电件	6057B00020V	P	黄铜	镀镍
3	UKK5-短导电件	6057B00010V	P	黄铜	镀镍
2	UKK5-端板	6057C1001AV	1	PA66	灰色
1	UKK5-本体	6057A1001AV	P	PA66	灰色
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	DATE 2012/10/16	UNITS	mm	THIRD ANGLE PROJECT	
CHK.	DATE	SIZE	A4	1 of 1	
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-6057001
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	UKK5-成品