
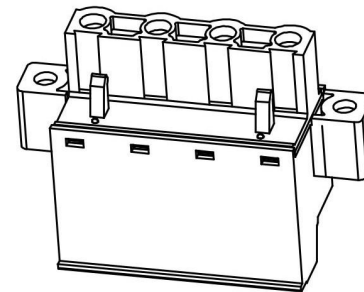


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		


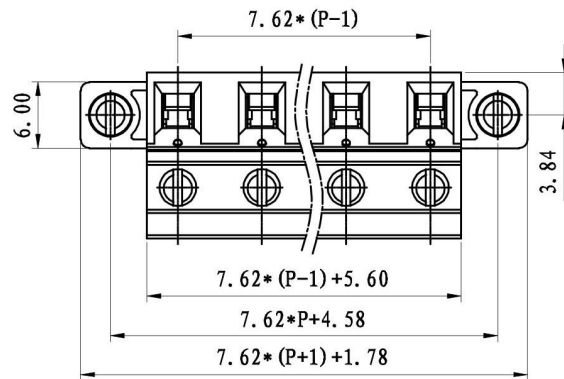


NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 7.62mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 22-12AWG
7. Screw Torque Value: 0.8 N.m

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 7.62mm
3. 耐电压值: AC 2500V/min
4. 绝缘电阻≥500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 22-12AWG
7. 螺丝扭力: 0.8 N.m

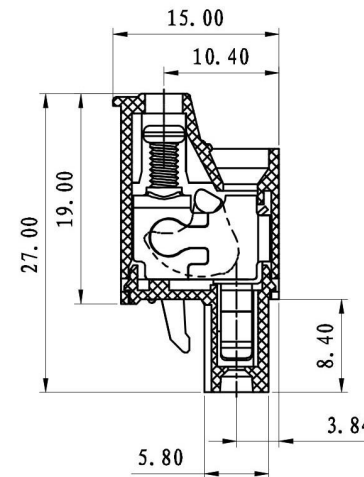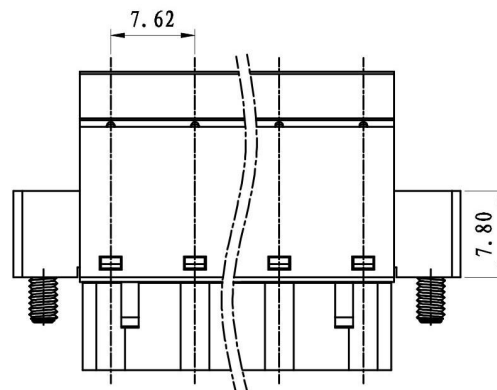

	pitch dimension			Nominal dimension					— □ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LC1-耳朵螺丝	SP0YA255101V	2	碳钢	三价铬钝化彩锌
6	LC3-5.08-夹子	1009B0002AV	P	磷青铜	镀镍
5	LC3-5.08-方盒	F1A0ALC358AV	P	碳钢	三价铬钝化彩锌
4	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
3	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
2	LC3-7.62-盖子	1125C0YXXAV	1	PA66	UL94-V0
1	LC3M-7.62-本体	1125M0YXXAV	1	PA66	UL94-V0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	YJX	DATE	2014/12/02	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-1125001	REV: V0
TITLE				LC3M-7.62-XP-1Y-00A	1 / 1
				LC3M-7.62-成品	



上海联捷电气有限公司
Shanghai Hlinker Electric Co., Ltd