
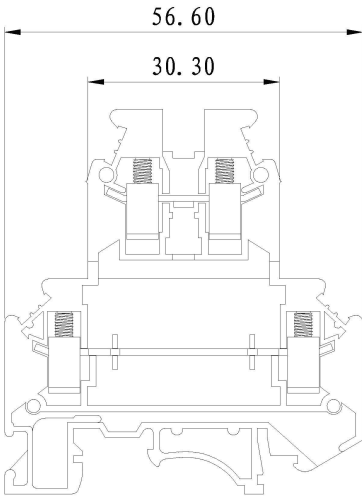
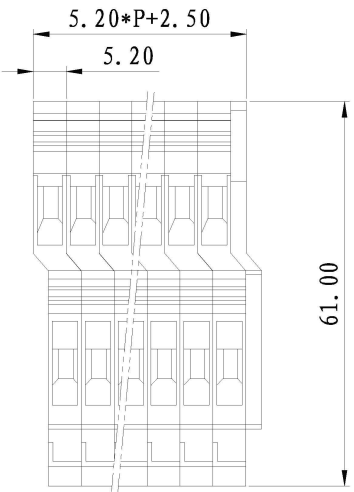


REVISION RECORD			
REV.	CONTENT	MOD.	DATE

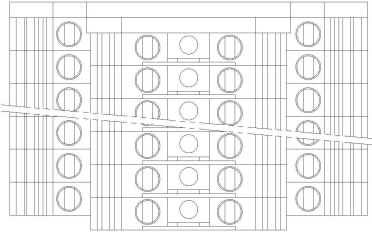

电气性能	
电压	500V
电流	24A
刚/柔性导线线	0.2-4mm ²
线规AWG	24-12
螺钉类型/扭力	M3/0.6-0.8Nm
绝缘材料类型	PA66
阻燃级别	V0

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid			≡	—	□	//	⊥	
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

6	UKK3-方块	6059B00030V	4P	黄铜	镀镍
5	UKK3-螺丝	SSM0300100V	4P	碳钢	镀镍
4	UKK3-长导电件	6059B00020V	P	黄铜	镀镍
3	UKK3-短导电件	6059B00010V	P	黄铜	镀镍
2	UKK3-端板	6059C1001AV	1	PA66	灰色
1	UKK3-本体	6059A1001AV	P	PA66	灰色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	2012/10/16	UNITS	mm	THIRD ANGLE PROJECTION SHEET
CHK.	DATE		SIZE	A4	1 of 1
APP.	DATE		SCALE	DWG NO.	SP-2-6059001
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	UKK3-XX-110-00A
					UKK3-成品