
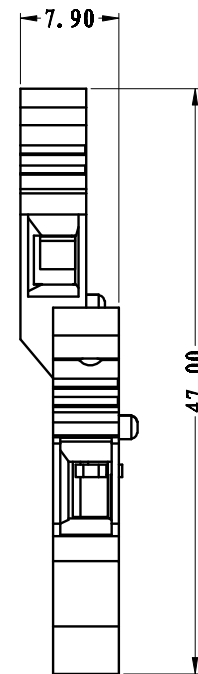
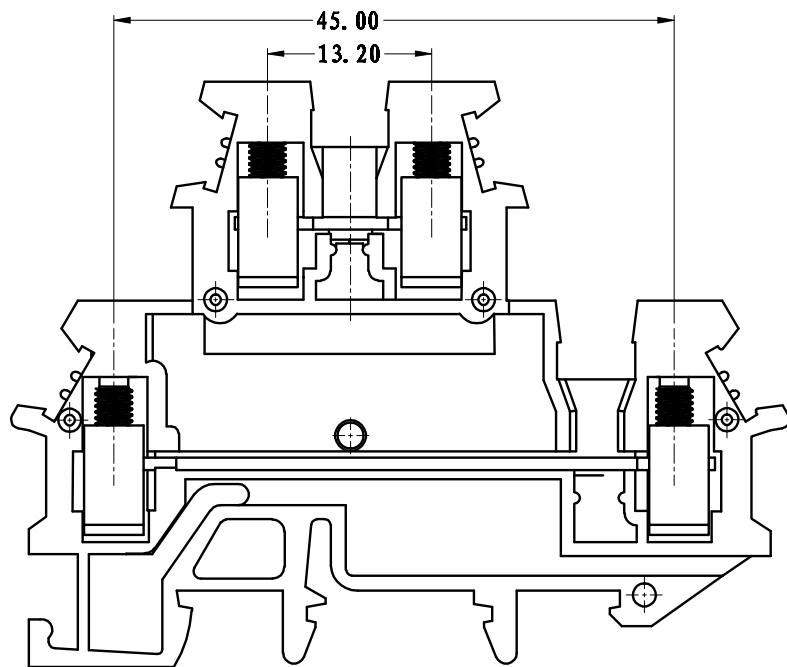


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△0	初版发行		

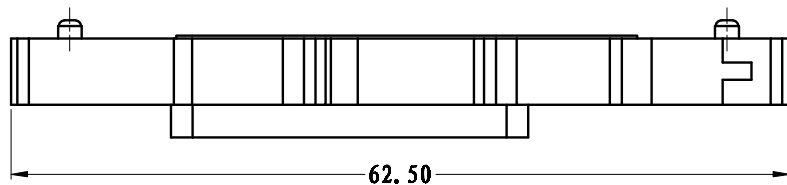

技术要求:

额定电压: 500V

额定电流: 24A

线径: 24-12AWG

螺丝扭矩: 0.8Nm

使用条件: -40℃ ~ +130℃

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

1	GB1000-02/1								
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL		NOTES	
DES.	ARKINE	DATE	18-09-20	UNITS	MM	THIRD ANGLE PROJECTION		SHEET	
CHK.		DATE		SIZE	A4			1 of 1	
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-DB10002	REV: V0	
上海联捷电气有限公司 Shanghai Hlinker Electric C.O., LTD						TITLE		MBKKR2. 5-1A	
								MBKKR2. 5-1A-成品	