



REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
①	初版发行		

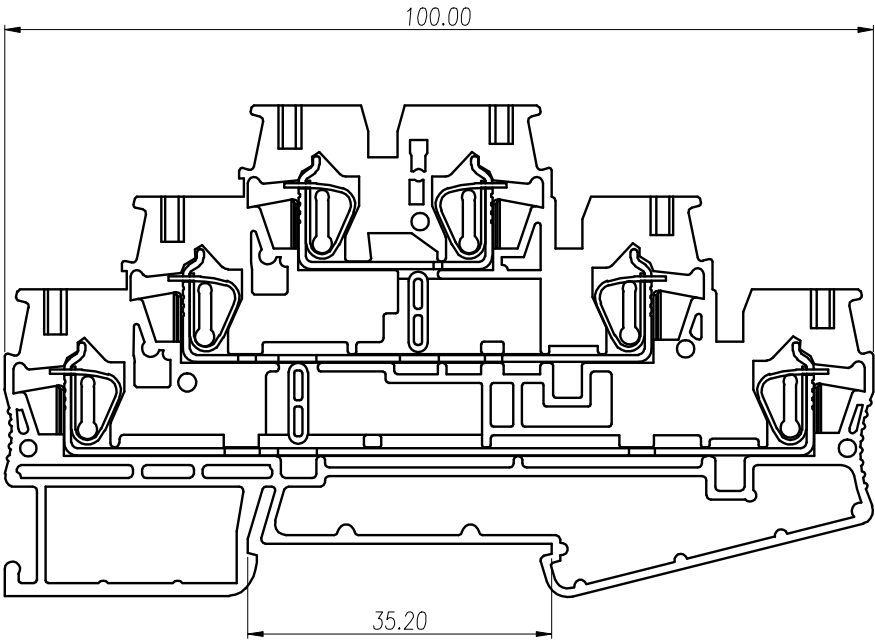

技术要求:

1. 额定电压: 500V, 额定电流: 28A
2. 耐电压值: AC 3000V/min
3. 使用条件: -40° - +105°
4. 适用线径: 2.5mm²

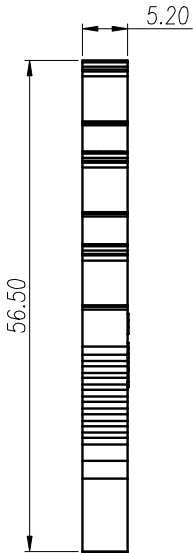

	pitch dimension			Naminal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱ ⤿
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	WD5-2.5/2/3-弹片	F2A00WD525BV	6	不锈钢	
4	WD5-2.5/2/3-导电件3	6WDSB00003AV	1	黄铜	镀镍
3	WD5-2.5/2/3-导电件2	6WDSB00002AV	1	黄铜	镀镍
2	WD5-2.5/2/3-导电件1	6WDSB00001AV	1	黄铜	镀镍
1	WD5-2.5/2/3-主体	6WDSA100280V	1	PC	灰色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZD	DATE	18-09-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
 上海联捷电气有限公司 Shanghai Blinker Electric C.O,LTD				TITLE	WD5-2.5/2/3-1P-110-00A WD5-2.5/2/3-成品
				THIRD ANGLE PROJECTION	SHEET 1 of 1
				DWG NO. SP-2-6WD251	REV: V0