



REVISION RECORD			
REV.	CONTENT	MOD.	DATE


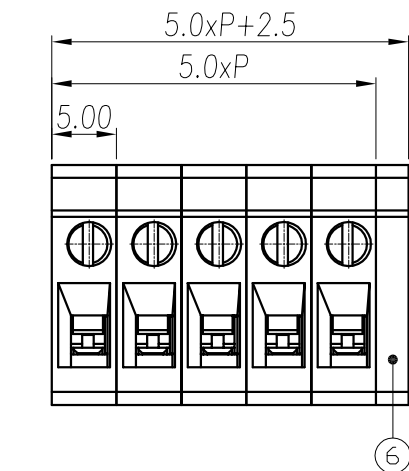


NOTES:

Pitch : 5.0mm
Rated Voltage : 300V
Rated Current : 10A
Withstand Voltage :
AC2000V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range :30~ 12AWG
Screw Torque Value : 0.44Nm

技术要求:

间距: 5.0mm
额定电压: 300V
额定电流: 10A
耐电压值: AC2000V/min
绝缘阻抗: 1000MΩ/DC500V
使用条件: -40℃ ~+105℃
适用线规: 30~12AWG
螺丝扭矩: 0.44Nm


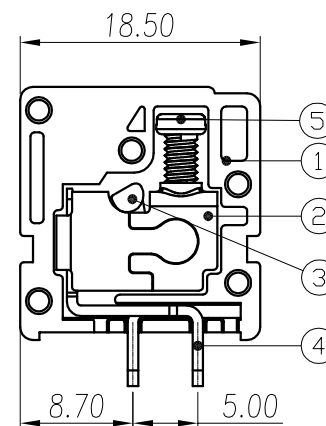
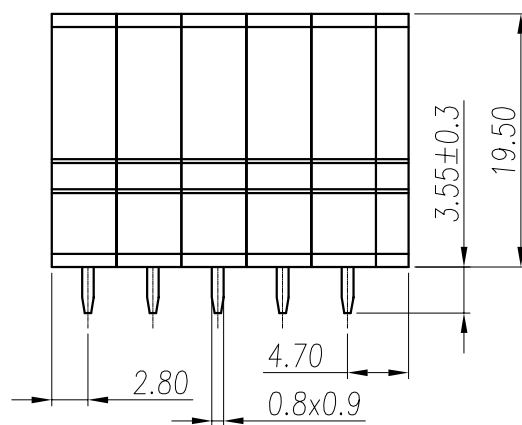


TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	short angle sid					≡	—	□	//	⊥
variable	to	over	over	over	over		over	over	over	over	over			over	over	over	
range	6	30	120	480	to	all	6	10	50	120	to	all	to	5	30	120	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

6	LG105V-2.5-盖板	2011C4Y01AV	1	PA66	UL94, V-0
5	LC3-5.08-螺丝	SSM0250020V	P	碳钢	三价铬钝化彩锌
4	LG105V-A焊脚	2011B00010V	P	紫铜	镀镍、镀锡
3	LC3-5.08-压块	1009B00010V	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F000000060V	P	碳钢	三价铬钝化彩锌
1	LG105V-5.0-主体	2011A4Y01AV	P	PA66	UL94, V-0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	2011/10/21	UNITS	mm	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	1 of 1
APP.	DATE		SCALE		DWG NO. SP-2-2011001
上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LG105V-5.0A-XXP-140-00A LG105V-5.0A

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△0	初版发行		

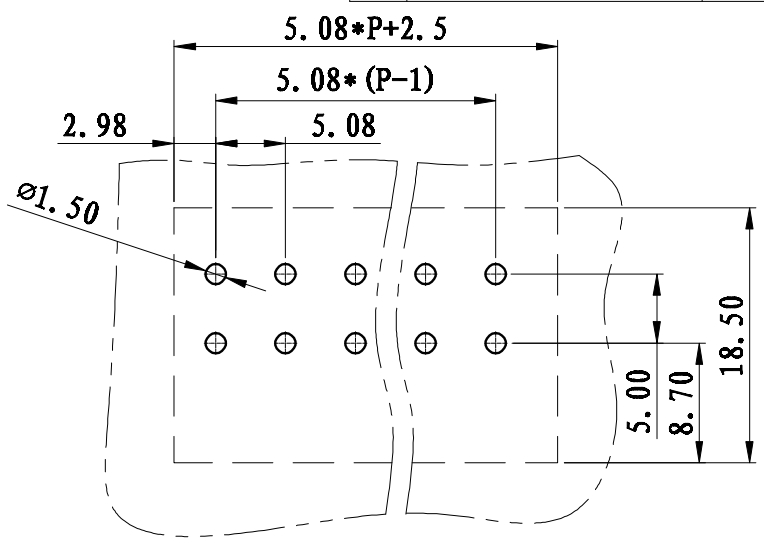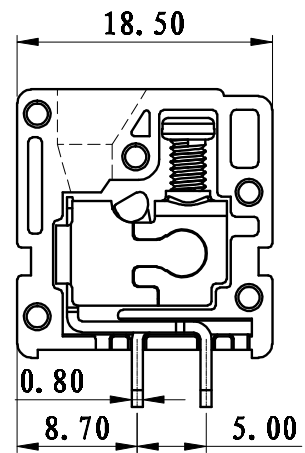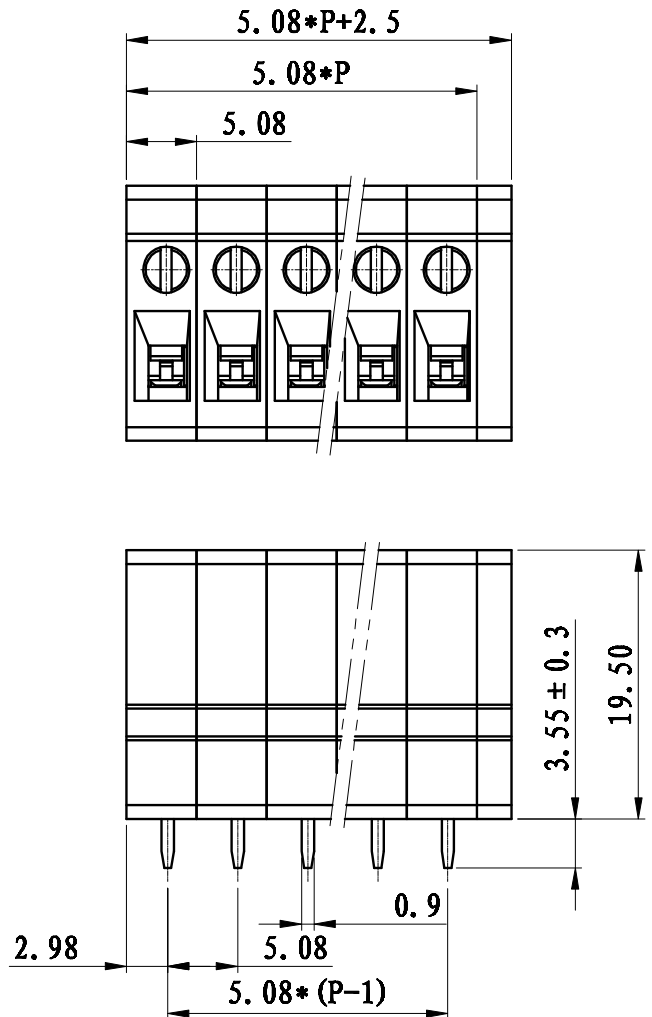




技术要求:
间距: 5.08mm
额定电压: 300V
额定电流: 24A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 30~12AWG
螺丝扭矩: 0.4 N.m

NOTES:
Pitch: 5.08mm
Rated Voltage: 300V
Rated Current: 24A
Withstand Voltage: AC2500V for 1 minute
Insulation Resistance: 500MΩ / DC500V
Using Temperature Range: -40℃ ~ +105℃
Wire range: 30~ 12AWG
Screw Torque Value: 0.4 N.m

	pitch dimension			Naminal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		0.05/10
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

6	LG105V-2.5-盖板		2011C0Y01AV		1	PA66-V0	
5	LC3-5.08-螺丝		SP0YA256501V		P	碳钢	三价铬钝化彩锌
4	LG105VA-焊脚		2011B0001AV		P	紫铜	镀锡
3	LC3-5.08-压块		1009B0001AV		P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒		F1A0ALC1031V		P	碳钢	三价铬钝化彩锌
1	LG105V-5.08-主体		2035A0Y01AV		P	PA66-V0	
NO. NAME OF PART			NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD						TITLE	LG105VA-5.08-XP-1Y-00A
							LG105VA-5.08-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE

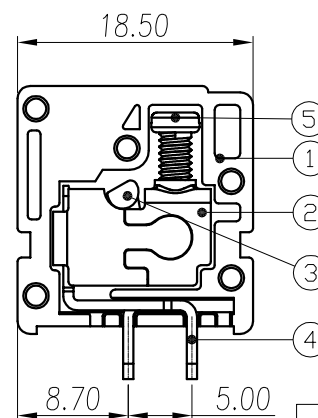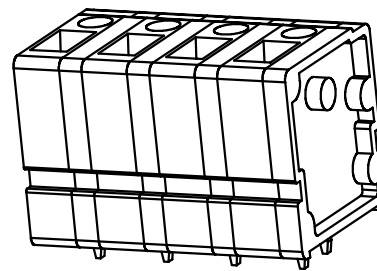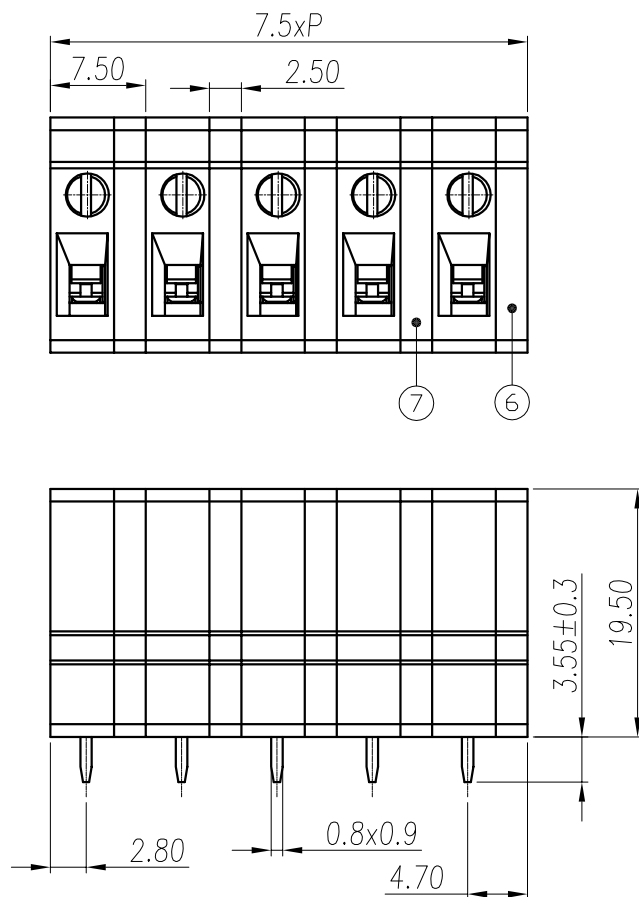

NOTES:

Pitch : 7.5mm
Rated Voltage : 300V
Rated Current : 10A
Withstand Voltage :
AC2000V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range :30~ 12AWG
Screw Torque Value : 0.44Nm




技术要求:

间距: 7.5mm
额定电压: 300V
额定电流: 10A
耐电压值: AC2000V/min
绝缘阻抗: 1000MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 30~12AWG
螺丝扭矩: 0.44Nm

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		∠	short angle sid			≡	—	□	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	to 480	all	to 6	over 6 to 10	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

7	LG105V-2.5-隔板	2011H4Y01AV	1	PA66	UL94, V-0
6	LG105V-2.5-盖板	2011C4Y01AV	1	PA66	UL94, V-0
5	LC3-5.08-螺丝	SSM0250020V	P	碳钢	三价铬钝化彩锌
4	LG105V-A焊脚	2011B00010V	P	紫铜	镀锡、镀锡
3	LC3-5.08-压块	1009B00010V	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F000000060V	P	碳钢	三价铬钝化彩锌
1	LG105V-5.0-主体	2011A4Y01AV	P	PA66	UL94, V-0
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	DATE	2011/10/21	UNITS	mm	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	1 of 1
APP.	DATE		SCALE		DWG NO. SP-2-2011002
上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LG105V-7.5A-XXP-140-001 LG105V-7.5A

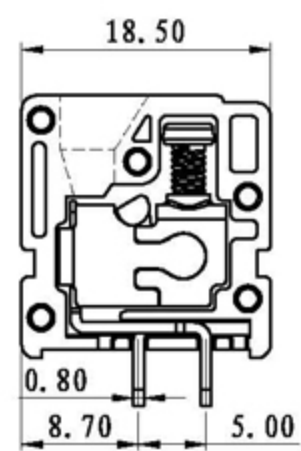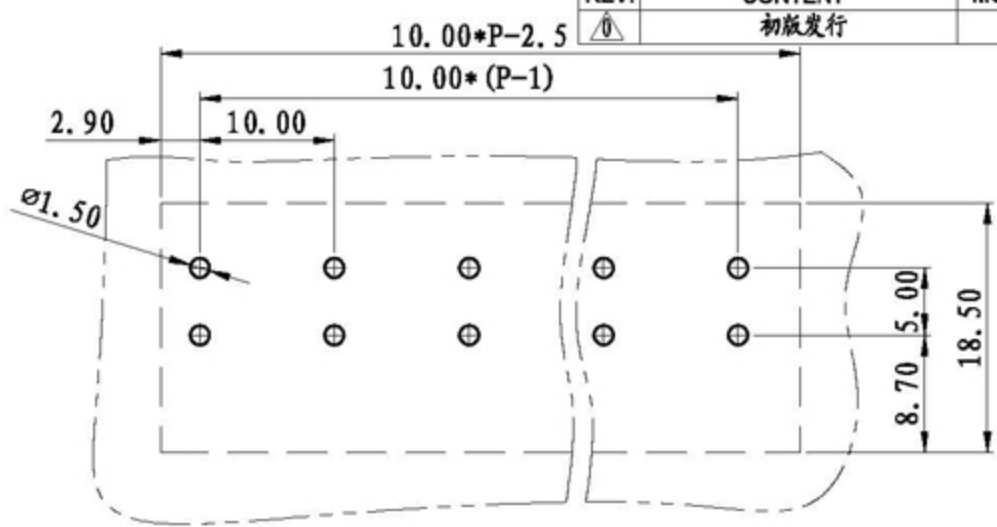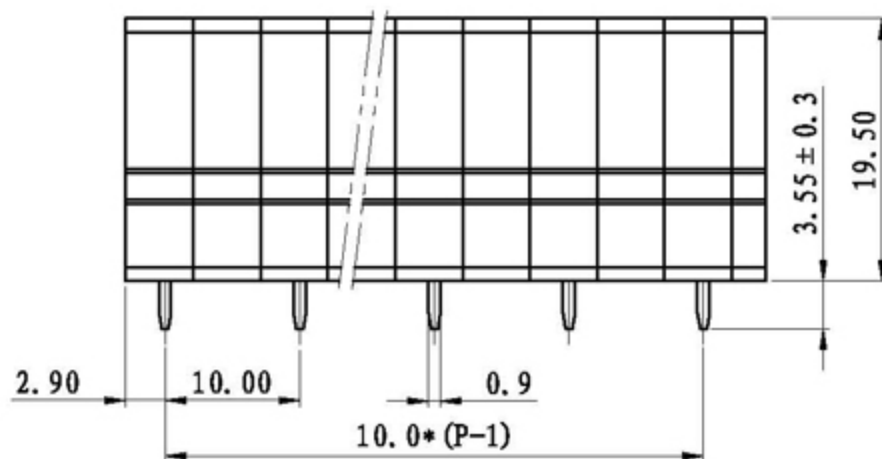

技术要求:
 间距: 10.0mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m

NOTES:
 Pitch: 10.0mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~12AWG
 Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LG105V-5.0-隔板	2045H0Y01AV	1	PA66-V0	
6	LG105V-2.5-盖板	2011C0Y01AV	1	PA66-V0	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG105YA-焊脚	2011B0001AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG105V-5.0-主体	2011A0Y01AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	UNITS	mm	THIRD ANGLE PROJECTION	SHEET
CHK.	DATE	SIZE	A4		1 of 1
APP.	DATE	SCALE	1:1	DWG NO. SP-2-2011005	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LG105YA-10.0-XP-1Y-00A LG105YA-10.0-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	初版发行		