
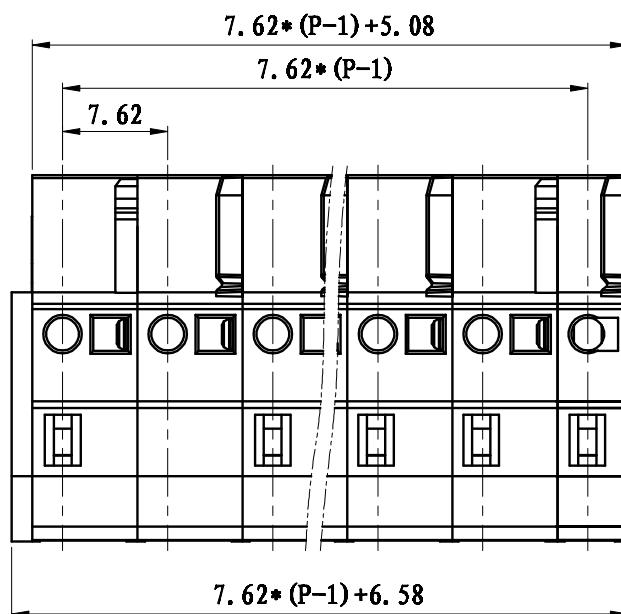


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

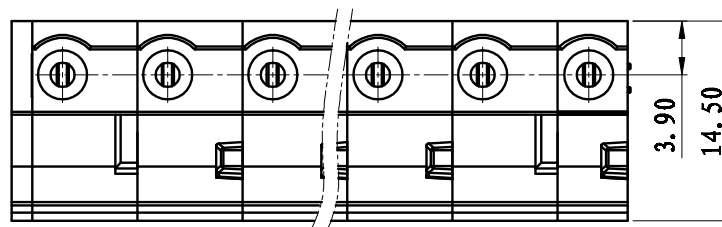


NOTES:

Pitch : 7.62mm
Rated Voltage : 300 V
Rated Current : 15 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 22~ 14AWG

技术要求:

间距: 7.62mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 22~ 14AWG

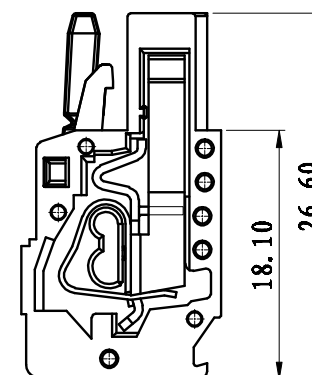

	pitch dimension			Nominal dimension					
	over	over	over	over	over	over	over	over	—
	0	6	10	0	30	60	100	150	□
variable	to	to	to	to	to	to	to		
range	6	10	24	30	60	100	150		○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LSC1-弹片	F2A0DLSLC1BV	P	不锈钢	
5	LSC1-夹子	1056B0001AV	P	磷青铜	镀镍
4	LSC1-5.08-盖板	1056C0Y01AV	1	PA66	
3	LSC1-7.62-中间件	1098A0Y01AV	P-3	PA66	
2	LSC1-5.08-中间件	1057A0Y01AV	1	PA66	
1	LSC1-7.62-边件2	1100A0Y01AV	2	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/08/15	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-1100001
				TITLE	LSC1B-7.62-XXP-1Y-00A
					LSC1B-7.62-成品



上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE

LSC1B-7.62-XXP-1Y-00A

LSC1B-7.62-成品