
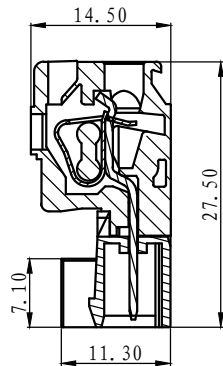
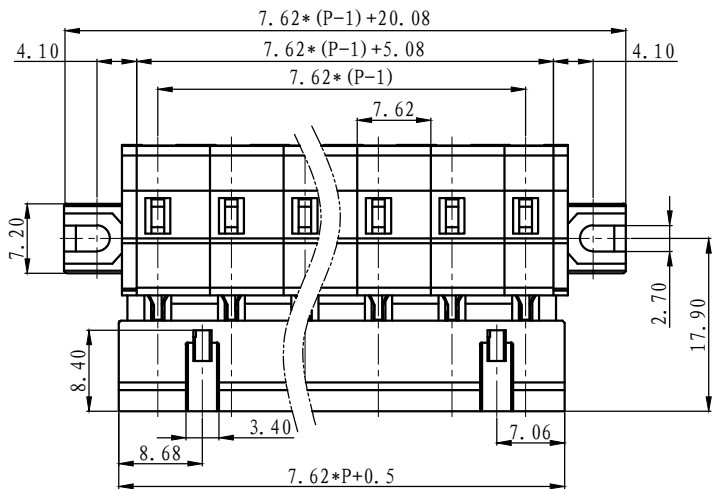


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

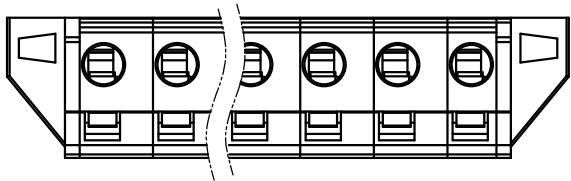


NOTES:

1. Voltage Rating: 400V, Current Rating: 20A
2. PITCH: 7.62mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40℃- +105℃
6. Suitable Electric Wire: 22-14AWG

技术要求:

1. 额定电压: 400V, 额定电流: 20A
2. 间距: 7.62mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗: 500兆欧
5. 使用条件: -40℃- +105℃
6. 适用线规: 22-14AWG

	pitch dimension			Nominal dimension					— —
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LSC10-7.62-本体		1097A0Y01AV	P-1	PA66		
6	LSC10-方针		1062B0001AV	P	紫铜	镀雾锡	
5	LSC1-弹片		F2A0DLSLC1BV	P	不锈钢		
4	LSZ10B-7.62-主体		1115A0YXXAV	1	PA66		
3	LSC10M-5.08-盖板2		1064C0Y01AV	1	PA66		
2	LSC10M-5.08-盖板1		1063C0Y01AV	1	PA66		
1	LSC10-5.08-本体		1062A0Y01AV	1	PA66		
NO.		NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2013/02/21	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.		DATE		SIZE	A4		SHEET 1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-1097A03
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE	
						LSC10BM-7.62-XXP-1Y-00A	
						LSC10BM-7.62-成品	