

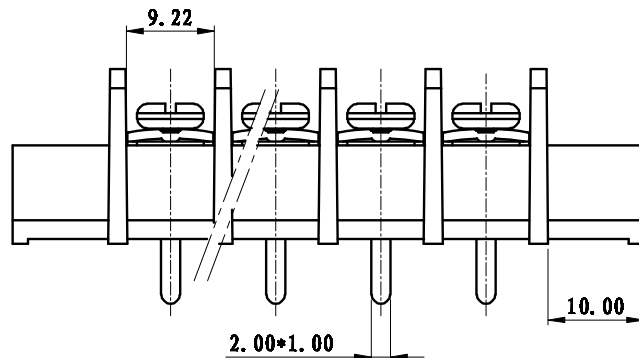
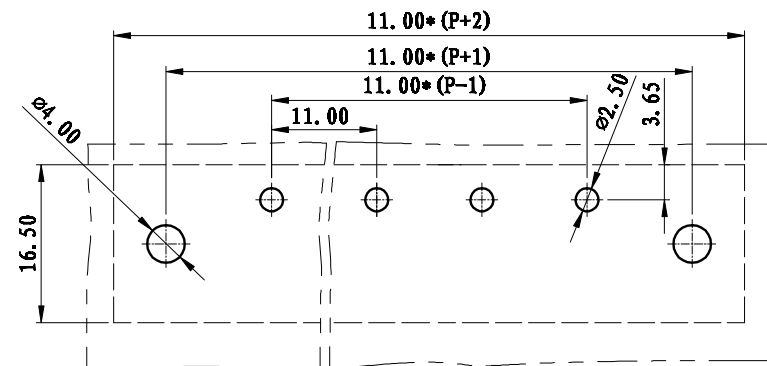


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
1	初版发行		

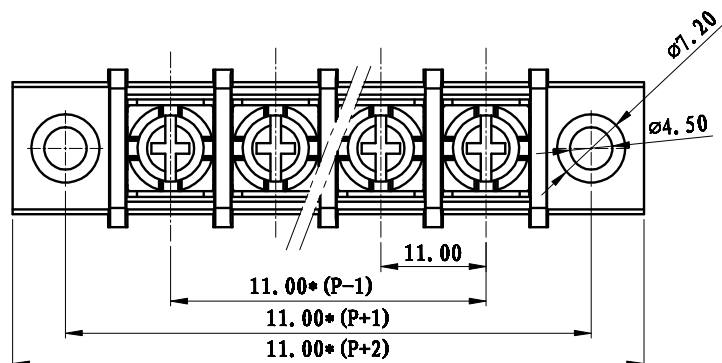


NOTES:

1. Voltage Rating: 300V, Current Rating: 20A
2. PITCH: 11.0mm
3. Insulation Withstand Voltage: AC2500V/min
4. Insulation Resistance: 50MΩ or more at 25°C
5. Using Temperature Range: -40° C ~ +130° C
6. Suitable Electric Wire: AWG 22-12
7. Screw Torque Value: 1.6 N.m

技术要求:

- 1.额定电压: 300V, 额定电流: 20A
- 2.间距: 11.0mm
- 3.绝缘电压: AC 2500V/min
- 4.绝缘电阻: 50MΩ
- 5.使用条件: -40° ~ +130°
- 6.适用线规: AWG 22-12
- 7.扭矩值: 1.6N.m

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



3	LW1B-11.0焊脚	5008B0002AV	P	黄铜	镀锡
2	M4*8-9*9螺丝	SQFFA408062V	P	碳钢	三价铬钝化彩锌
1	LW1B-11.0本体	5008MOVXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE 11-03-24	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1: 1	DWG NO. SP-1-5008006 REV: V0
				TITLE	LW1B-11.0-XXP-1Y-00A
Shanghai Hlinker Electric C.O., LTD					LW1B-11.0-成品