

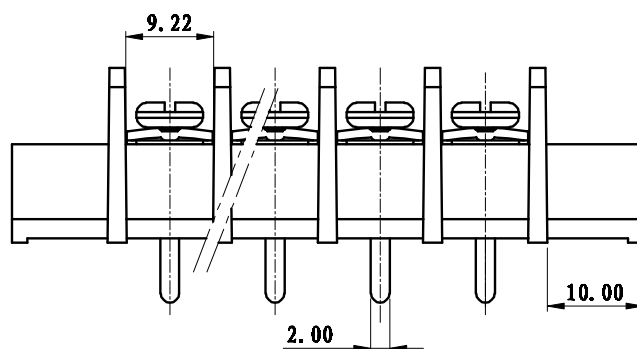
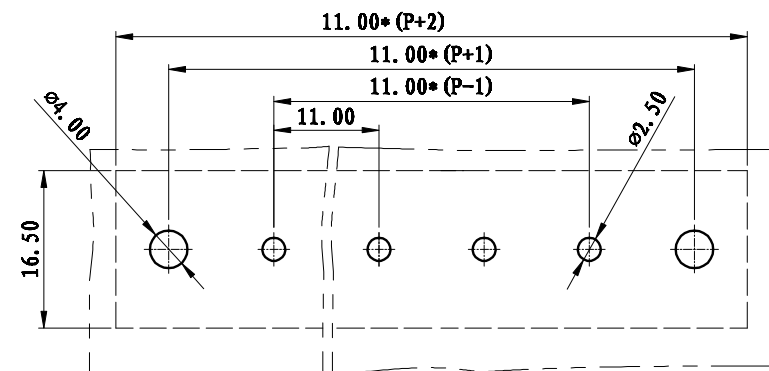


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	初版发行		

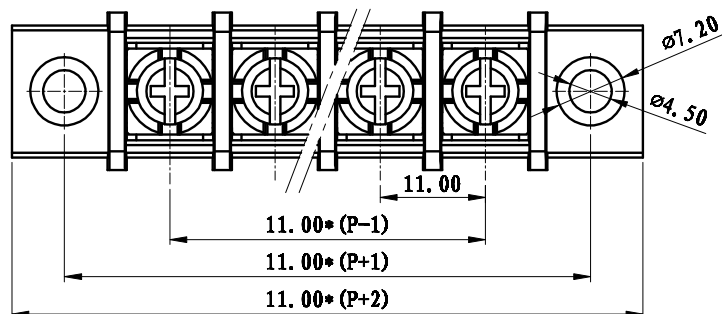

NOTES:

1. Voltage Rating: 300V, Current Rating: 20A
2. PITCH: 11.8mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500M or more at 2500V
5. Using Temperature Range: -40° - +130° C
6. Suitable Electric Wire: AWG 22-23
7. Power Factor Value: 1.0 Ls

技术要求:

- 1.额定电压: 300V, 额定电流: 20A
- 2.间距: 11.8mm
- 3.耐电压试验: AC 2500V/min
- 4.绝缘电阻≥500M
- 5.使用温度: -40° - +130°
- 6.适用线规: AWG 22-23
- 7.功率因数: 1.0Ls

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



3	LW1C-11.0焊脚	5008B0001AV	P	黄铜	镀雾锡
2	M4*8-9螺丝	SQFFA408062V	P	碳钢	三价铬钝化彩锌
1	LW1M-11.0-本体	5008M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-24	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-1-5008001
				REV:	V0
				TITLE	LW1MC-11.0-XP-1Y-00A
					LW1MC-11.0-成品



上海联捷电气有限公司
Shanghai Hlinker Electric Co., Ltd

LW1MC-11.0-XP-1Y-00A
LW1MC-11.0-成品