
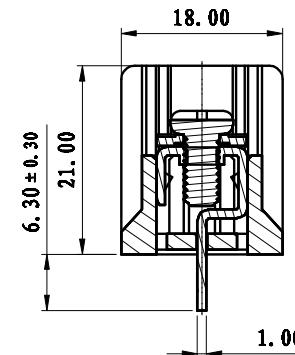
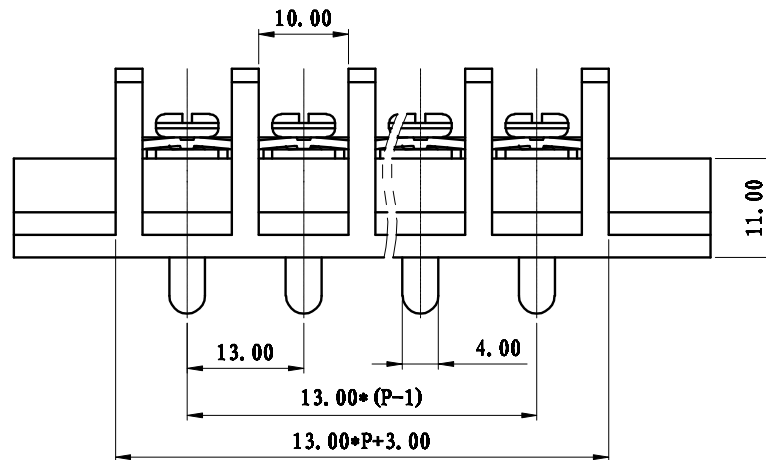
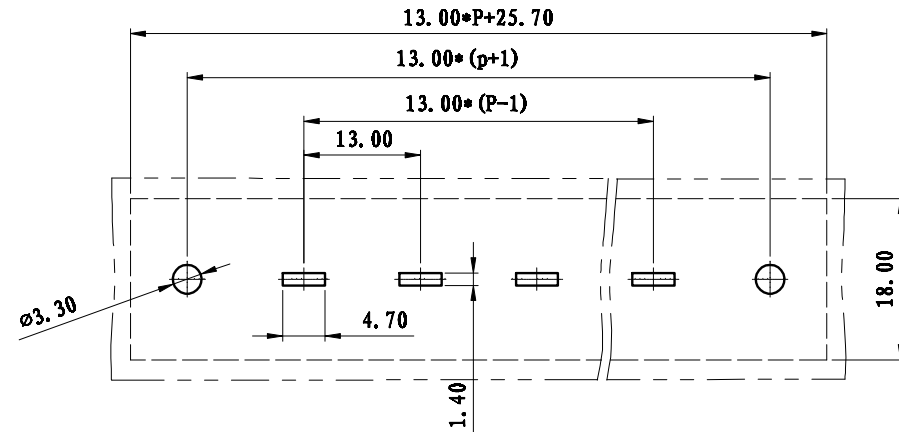


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

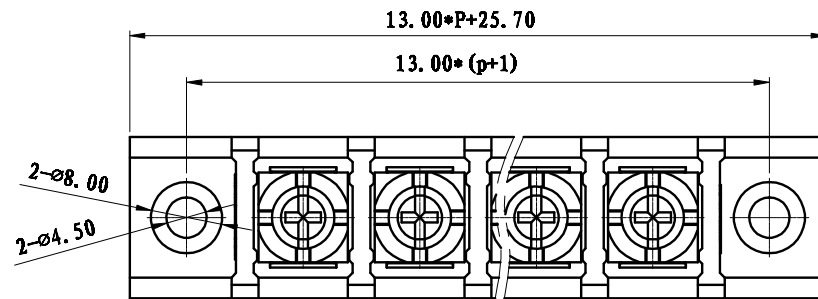

NOTES:
Pitch : 13.0mm
Rated Voltage : 800V
Rated Current : 40 A
Withstand Voltage :
AC3000V for 1 minute
Insulation Resistance :
1000MΩ / DC1000V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 18~10 AWG
Screw Torque Value : 1.6Nm

技术要求:
间距: 13.0mm
额定电压: 600V
额定电流: 40A
耐电压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+130℃
适用线规: 18~10 AWG
螺丝扭矩: 1.6Nm

	pitch dimension			Nominal dimension					
variable	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		◇
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LW1C-13.0-焊脚	5020B0001AV	P	黄铜	镀锡
2	M4*8-10*10	SQFFA408073V	P	碳钢	三价铬钝化
1	LW1M-13.0-主体	5020MOYXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/4/27	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				THIRD ANGLE PROJECTION	1 of 1
				DWG NO.	SP-2-5020005
				REV:	V0
				TITLE	LW1MC-13.0-XXP-1Y-00A
					LW1MC-13.0-成品

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD