
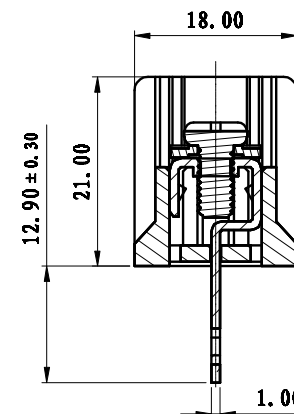
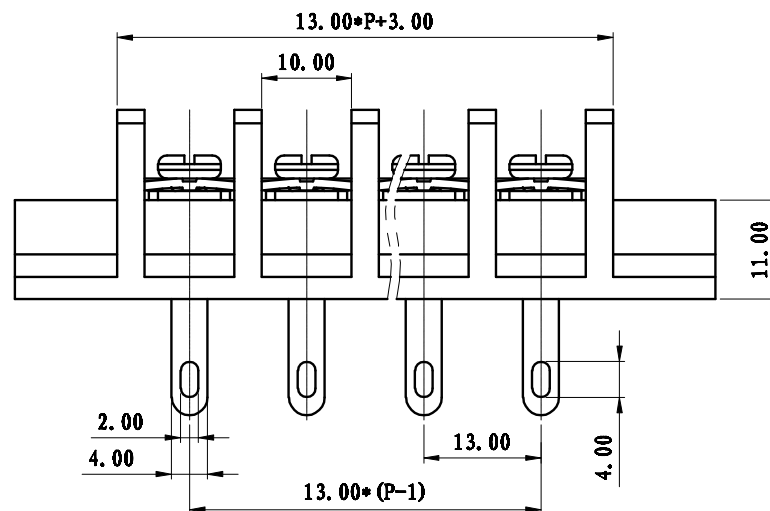
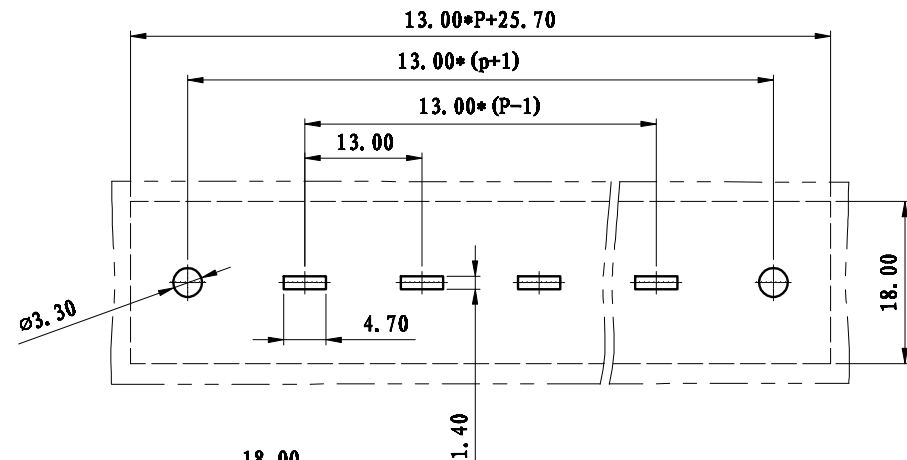


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

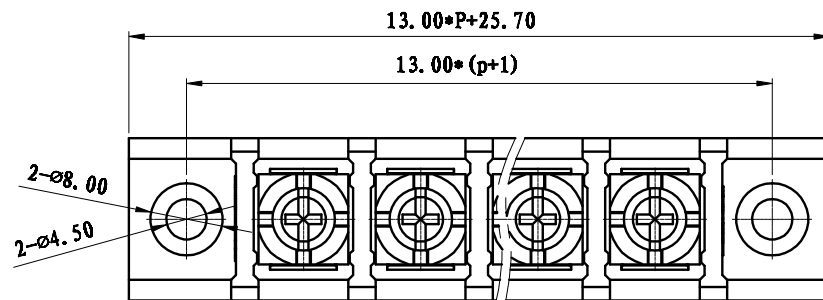

NOTES:
Pitch: 13.0mm
Rated Voltage: 600V
Rated Current: 40 A
Withstand Voltage:
AC3000V for 1 minute
Insulation Resistance:
1000M Ω / DC1000V
Using Temperature Range:
-40 $^{\circ}$ C ~ +130 $^{\circ}$ C
Wire range: 18~10 AWG
Screw Torque Value: 1.6Nm

技术要求:
间距: 13.0mm
额定电压: 600V
额定电流: 40A
耐电压值: AC3000V/min
绝缘阻抗: 1000M Ω /DC1000V
使用条件: -40 $^{\circ}$ C~+130 $^{\circ}$ C
适用线规: 18~10 AWG
螺丝扭矩: 1.6Nm

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

3	LW1Q-13.0-焊脚	5020B0003AV	P	黄铜	镀锡铜
2	M4*8-10*10	SQFFA408073V	P	碳钢	三价铬钝化彩锌
1	LW1M-13.0-主体	5020M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/4/27	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-5020007
				REV:	V0
				TITLE	LW1MQ-13.0-XXP-1Y-00A
					LW1MQ-13.0-成品

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD