
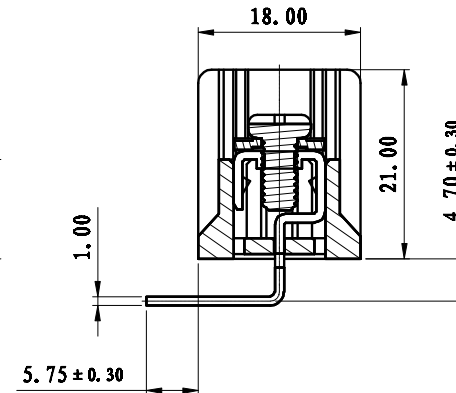
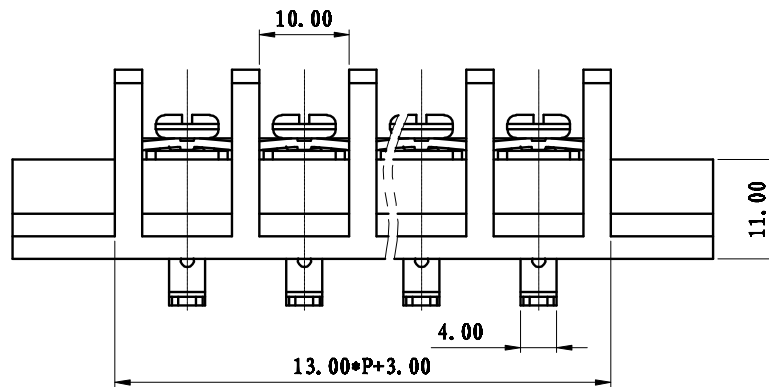
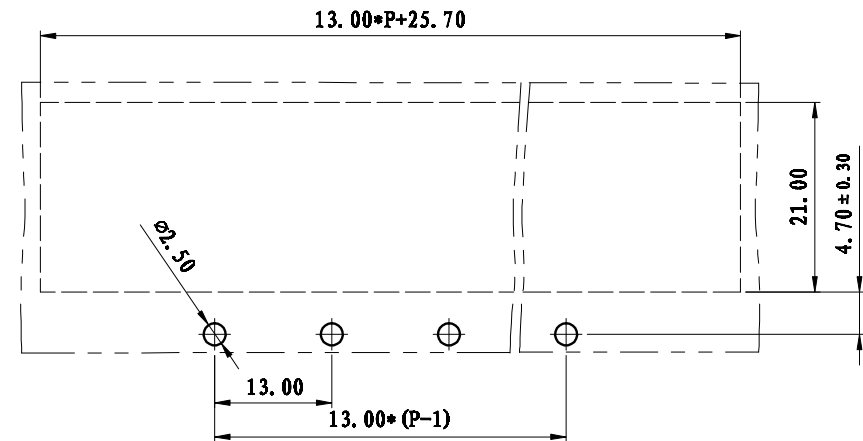


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

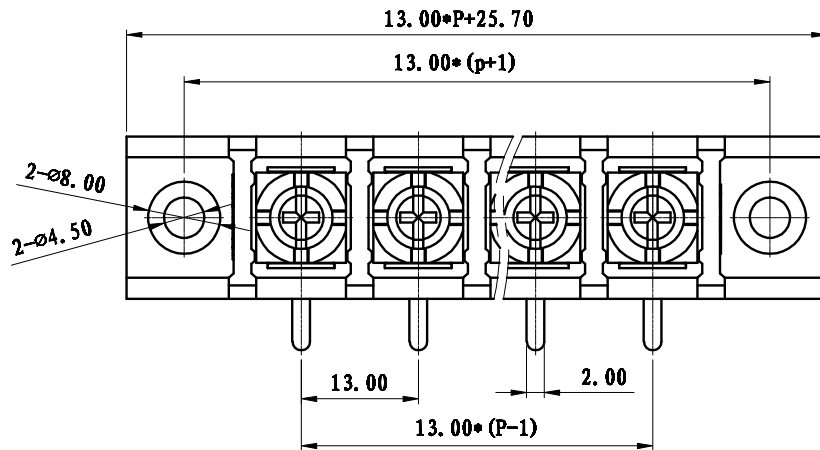

NOTES:
Pitch: 13.0mm
Rated Voltage: 600V
Rated Current: 40 A
Withstand Voltage:
AC3000V for 1 minute
Insulation Resistance:
1000MΩ / DC1000V
Using Temperature Range:
-40℃ ~ +130℃
Wire range: 18~10 AWG
Screw Torque Value: 1.6Nm

技术要求:
间距: 13.0mm
额定电压: 600V
额定电流: 40A
耐电压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+130℃
适用线规: 18~10 AWG
螺丝扭矩: 1.6Nm

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LW1R-13.0-焊脚	5020B0004AV	P	黄铜	镀锡
2	M4*8-10*10	SQFFA408073V	P	碳钢	三价铬钝化镀锌
1	LW1M-13.0-主体	5020M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/4/27	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-5020008
				REV:	V0
				TITLE	LW1MR-13.0-成品

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD