
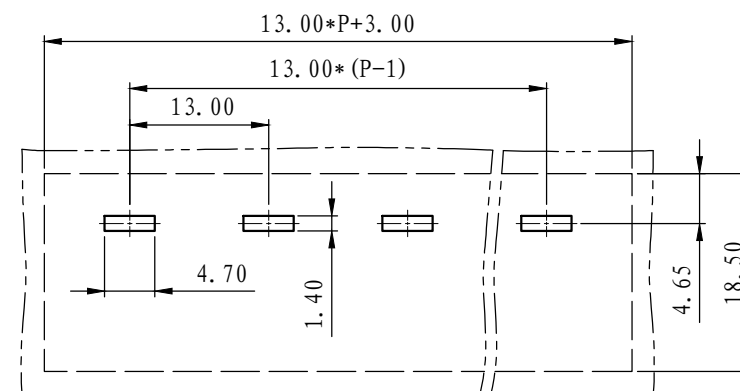
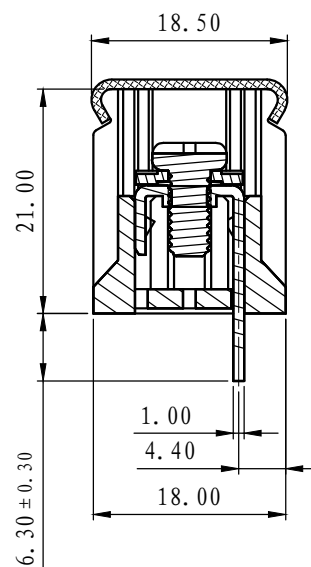
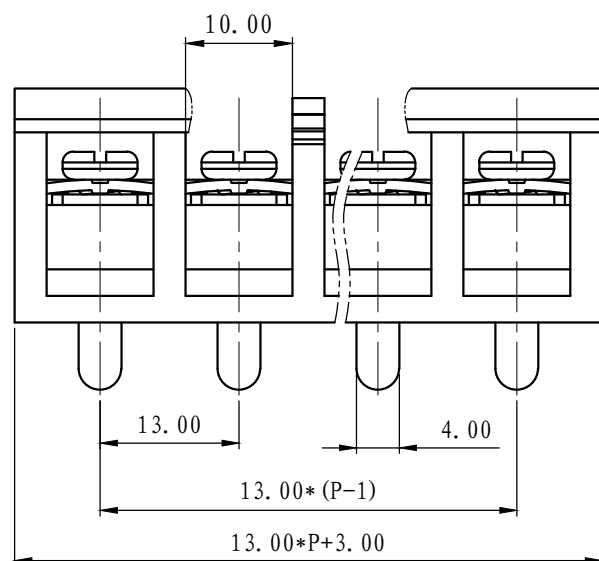


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

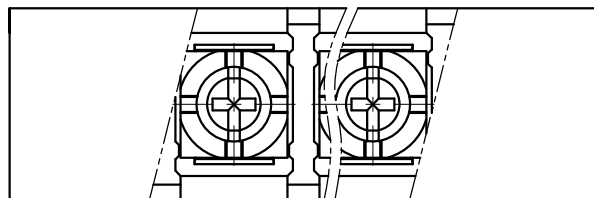

NOTES:

Pitch : 13.0mm
Rated Voltage : 600V
Rated Current : 40 A
Withstand Voltage :
AC3000V for 1 minute
Insulation Resistance :
1000MΩ / DC1000V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 18~10 AWG
Screw Torque Value : 1.6Nm

技术要求:

间距: 13.0mm
额定电压: 600V
额定电流: 40A
耐压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+130℃
适用线规: 18~10 AWG
螺丝扭矩: 1.6Nm

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LW2-13.0盖板	5022C0YXXAV	1	PC	
3	LW1B-13.0-焊脚	5020B0002AV	P	黄铜	镀雾锡
2	M4*8-10*10	SQFFA408073V	P	碳钢	镀三价铬钝化彩锌
1	LW2-13.0-主体	5022A0YXXAV	1	PBT	UL94, V-0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/4/27	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-5022002	REV: V0
TITLE				LW2B-13.0-XXP-1Y-00A	1 of 1
				LW2B-13.0-成品	



上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD