
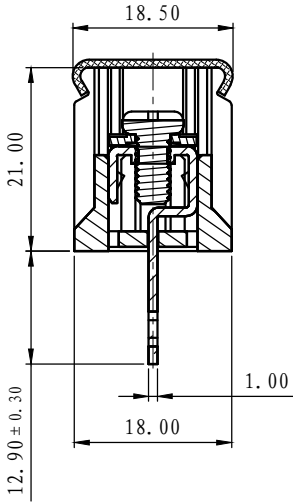
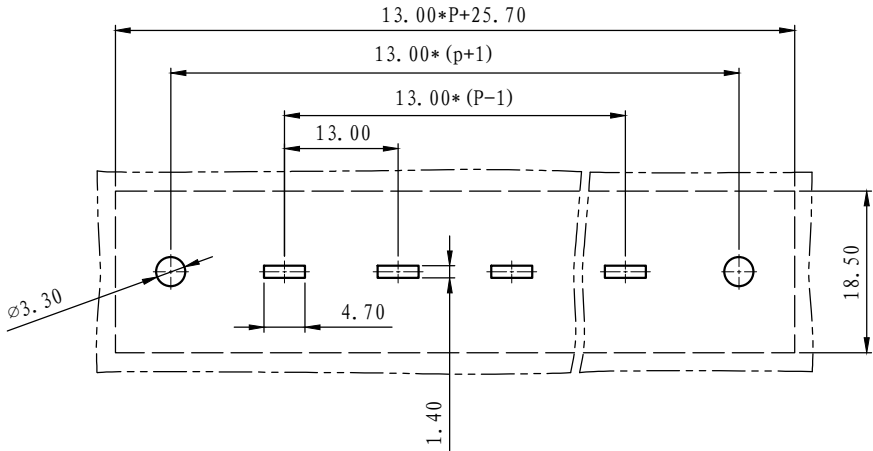
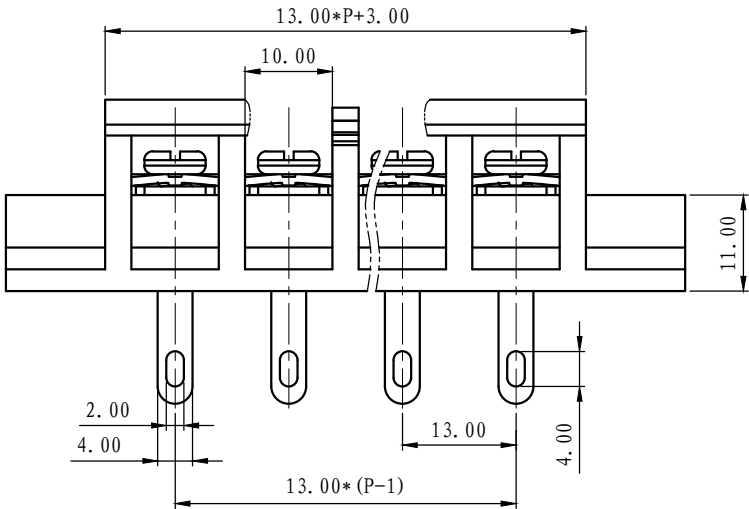


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

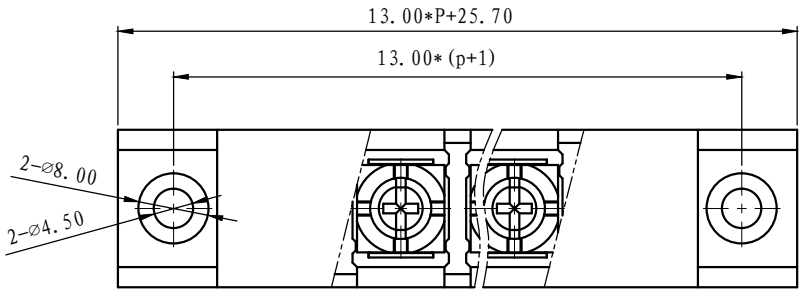

NOTES:
Pitch: 13.0mm
Rated Voltage: 600V
Rated Current: 40 A
Withstand Voltage :
AC3000V for 1 minute
Insulation Resistance :
1000MΩ / DC1000V
Using Temperature Range :
- 40℃ ~ + 130℃
Wire range: 18~10 AWG
Screw Torque Value : 1.6Nm

技术要求:
间距: 13.0mm
额定电压: 600V
额定电流: 40A
耐电压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+130℃
适用线规: 18~10 AWG
螺丝扭矩: 1.6Nm

	pitch dimension			Naminal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱ ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LW2-13.0盖板	5022C0YXXAV	1	PC	
3	LW1Q-13.0-焊脚	5020B0003AV	P	黄铜	镀雾锡
2	M4*8-10*10	SQFFA408073V	P	碳钢	镀三价铬钝化彩锌
1	LW2M-13.0-主体	5022M0YXXAV	1	PBT	UL94, V-0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE 2012/4/27	UNITS	mm	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	⊕ ▱ 1 of 1
APP.	DATE		SCALE	1:1	DWG NO. SP-2-5022007 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LW2MQ-13.0-XXP-1Y-00A LW2MQ-13.0-成品