


REVISION RECORD			
REV.	CONTENT	MOD.	DATE

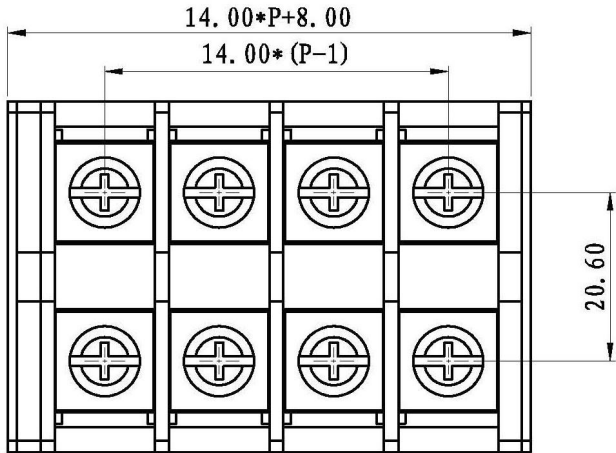

技术要求:

额定电压: 600V

额定电流: 41A



适用线规: 6.0mm

扭矩: 2.0-3.0Nm

螺丝规格: M5

塑壳材料: PC

阻燃等级: V1

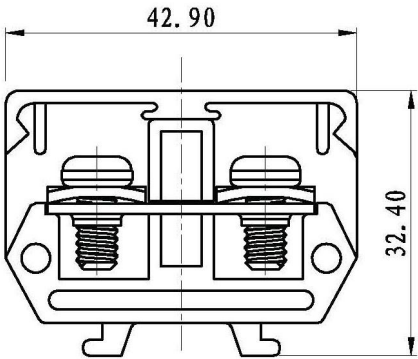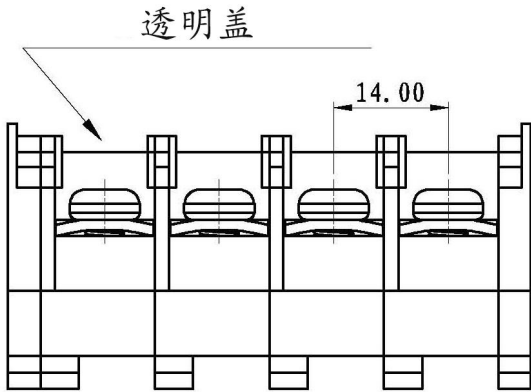

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	short angle sid				≡	—	□	//	⊥
	over 6	over 30	over 120	over 480		over 6	over 10	over 50	over 120			over 5	over 30	over 120	
variable range	to 6	to 30	to 120	to 480	all	to 6	to 10	to 50	to 120	all	to 5	to 30	to 120		
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1° 30'	20'	10'	0.3	0.025	0.06	0.12 0.4

5	JH9-30 Top Cover	6035C00010V	1	PC	Transparent
4	TR-40 Screw	SSD0500010V	2P	Stell	Zn-Plated
3	JH9-30 Conductive parts	6035B00010V	P	Brass	NI-Plated
2	JH9-30 Cover	6035B30XXAV	2	PC	Black
1	JH9-30 Housing	6035A30XXAV	P	PC	Black
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	
APP.		DATE	SCALE	1:1	
上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	JH9-30XX-130-00A JH9-30A