
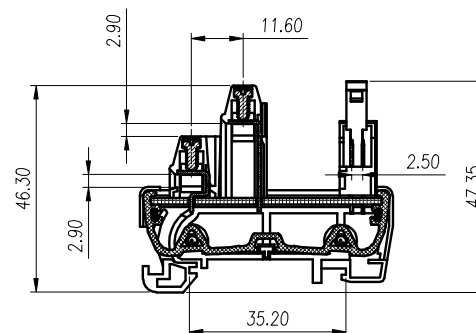
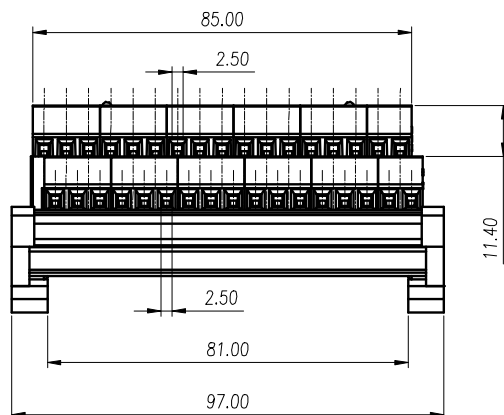


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
▲	初版发行		

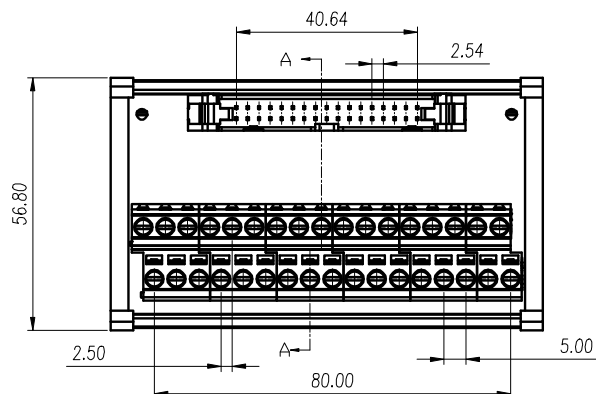

SECTION A-A

技术要求:
 间距: 5.0mm
 额定电压: 300V
 额定电流: 10A
 耐电压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 26~14AWG
 螺丝扭矩: 0.4Nm

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

8	LG500BZL-5, 0-2*3-成品	LG500BZL-5, 0-2*3-140-00A	5	PA66	
7	LG500BZL-5, 0-2*2-成品	LG500BZL-5, 0-2*2-140-00A	1	PA66	
6	DC2-34P-牛角插座	6DC2A300347V	1		
5	MJC-F34端子模组基板	4018A0034AV	1		
4	M3, 0*12自攻螺丝	SQZ0A30A203V	4	铁	镀锌
3	JUM-52-主体	6JUMA400013V	1	PA66	绿色
2	JUM-52-右挡板	6JUMC400023V	1	PA66	绿色
1	JUM-52-左挡板	6JUMC400013V	1	PA66	绿色
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	
DES.	ZGC	DATE	2020/07/11	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-6MJC/F34
				TITLE	MJC-F34
					MJC-F34端子模组



上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD



SHEET
1 of 1

REV: V0