


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①			

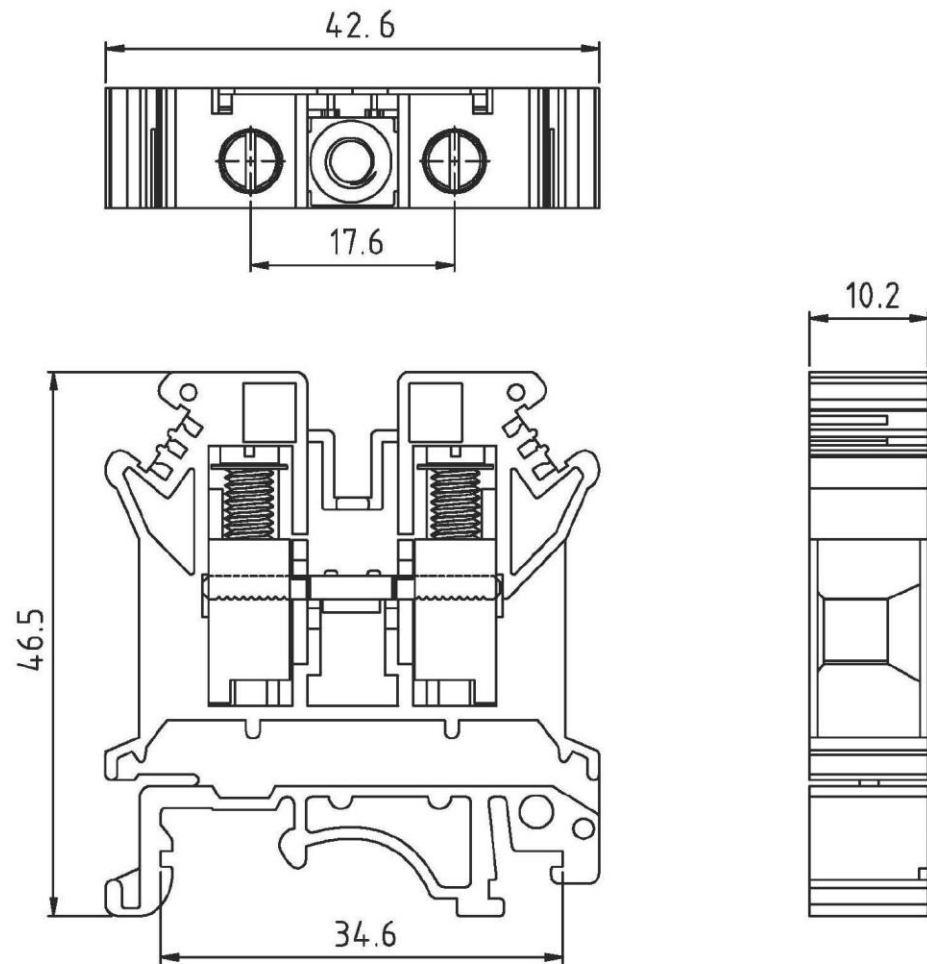

电气性能	
电压	800V
电流	76A
刚/柔性导线	0.5-16/0.5-10mm ²
线规AWG	24-6
螺钉类型/扭力	M4/1.5-1.8Nm
绝缘材料类型	PA66
阻燃级别	V0

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	短角边	≡	—	∕	∕	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	over 6 to 6	over 10 to 10	over 50 to 50	over 120 to 120	all	over 5 to 30	over 30 to 120
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.3

NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	DATE	10/04/05	UNITS	MM	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	of
APP.	DATE		SCALE	1:1	DWG NO.
 上海联捷电气有限公司 Shanghai Blinker Electric C.O.,L'D				TITLE	UK10N