
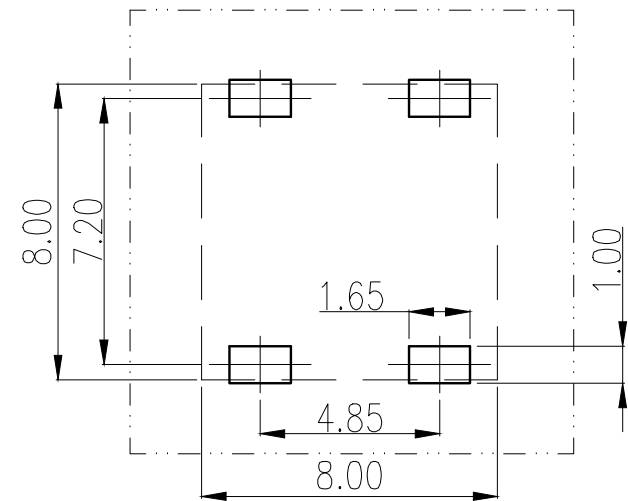


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

技术要求:

1. 材质: 黄铜, 厚度0.8mm。
2. 打铜底2um, 镀镍2um, 镀锡4um。
3. 螺牙扭力矩达到0.8N.m以上, 符合M3-6H的螺
纹规检测, 螺牙不能有乱牙、豁牙、滑牙现象。
4. 不得有变形, 毛刺等缺陷。
5. 适用线规格: 24-12AWG
6. 额定电流: 40A

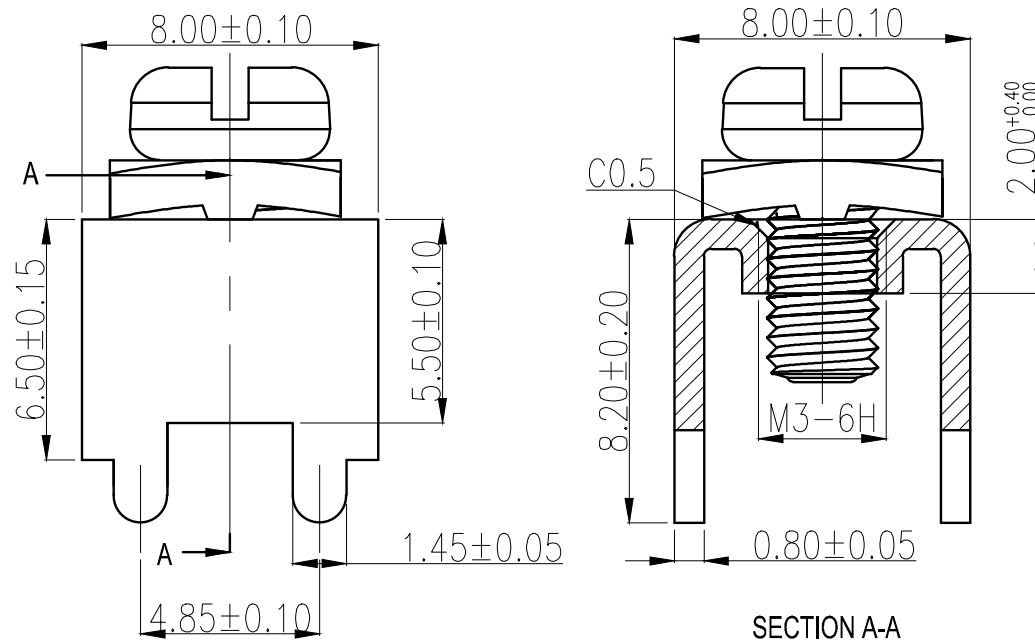

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

1	3*6-6.5*6.5三价五价铬雾过四十八小时			碳钢	三价铬钝化彩锌
1	E4.85*8.0*8.2/4+M3			黄铜	镀雾锡
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZJL	DATE 2021/09/17	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	SHEET 1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	REV: T0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	E4.85*8.0*8.2/4+M3/6*6.5 E4.85*8.0*8.2/4+M3/6*6.5产品