
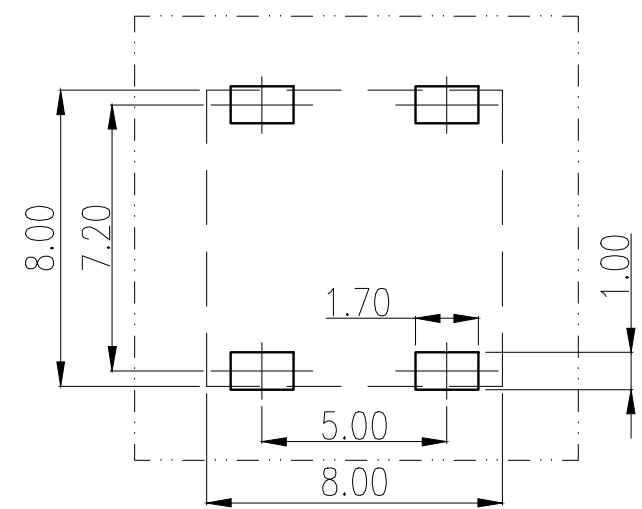


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

技术要求:

1. 材质: 黄铜, 厚度0.8mm.
2. 打铜底2um, 镀镍2um, 镀锡4um.
3. 螺牙扭力矩达到0.8N.m以上, 符合M3-6H的螺
纹规检测, 螺牙不能有乱牙、豁牙、滑牙现象.
4. 不得有变形, 毛刺等缺陷.
6. 额定电流: 40A

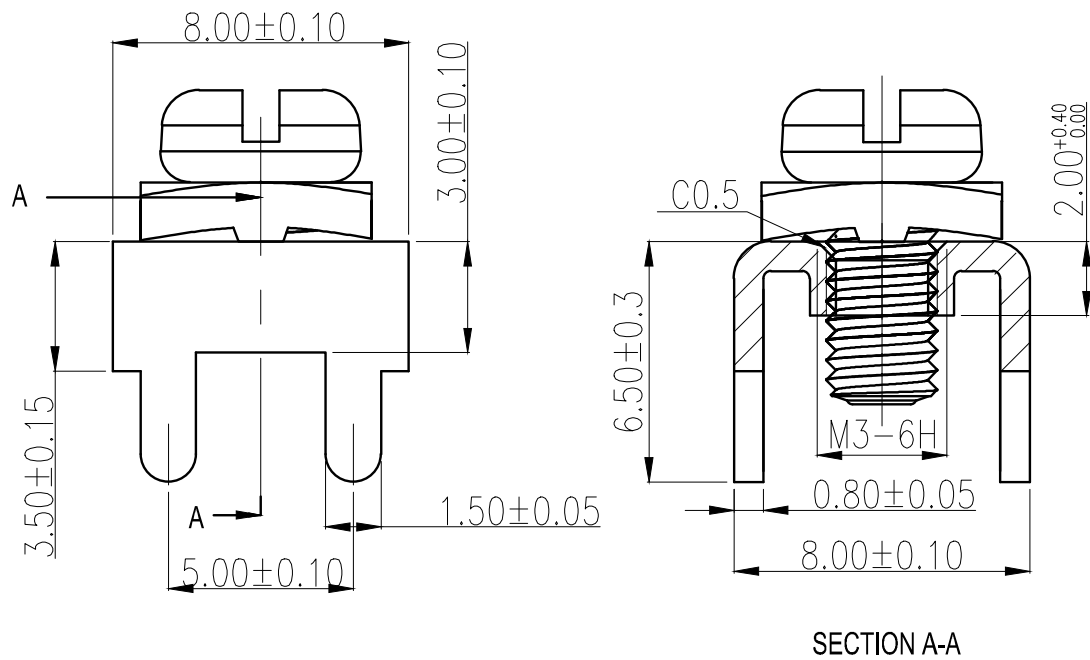

	pitch dimension			Naminal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		▱ ⤿
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

1	3*6-6.5*6.5三价五价铬雾过四十八小时			碳钢	三价铬钝化彩锌
1	E5.0*8.0*6.5/4*M3			黄铜	镀雾锡
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZJL	DATE 2021/09/17	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-7002001 REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	E5.0*8.0*6.5/4*M3/6*6.5 E5.0*8.0*6.5/4*M3/6*6.5产品