
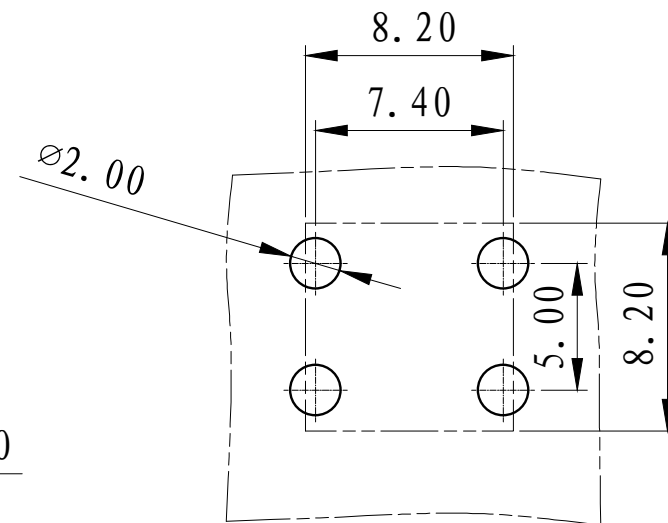
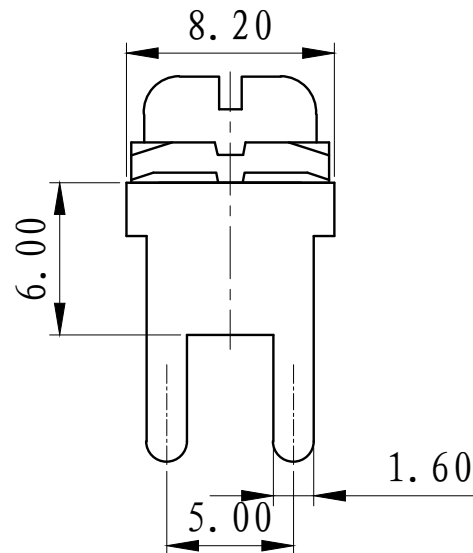
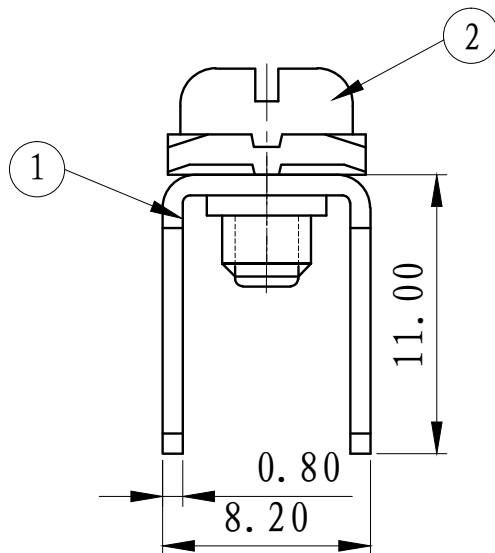


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		



技术要求:

1. 螺钉孔类型/扭力: M3.5/0.8 N.m以上

2. 适用线规: 24~10AWG

3. 额定电流: 40A

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ⤿
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	M3.5*6-7.5*7.5		1	碳钢	镀镍
1	E5.0*8.2*11.0/4*M3.5	7003T0001AV	1	黄铜	镀雾锡
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	ZMF	DATE 2019/04/11	UNITS mm	THIRD ANGLE PROJECTION	SHEET 1 of 1
CHK.		DATE	SIZE A4		
APP.		DATE	SCALE 1:1	DWG NO. SP-2-7003001	REV: T0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	E5.0*8.2*11.0/4*M3.5/6*7.5-100-001 E5.0*8.2*11.0/4*M3.5/6*7.5-产品