



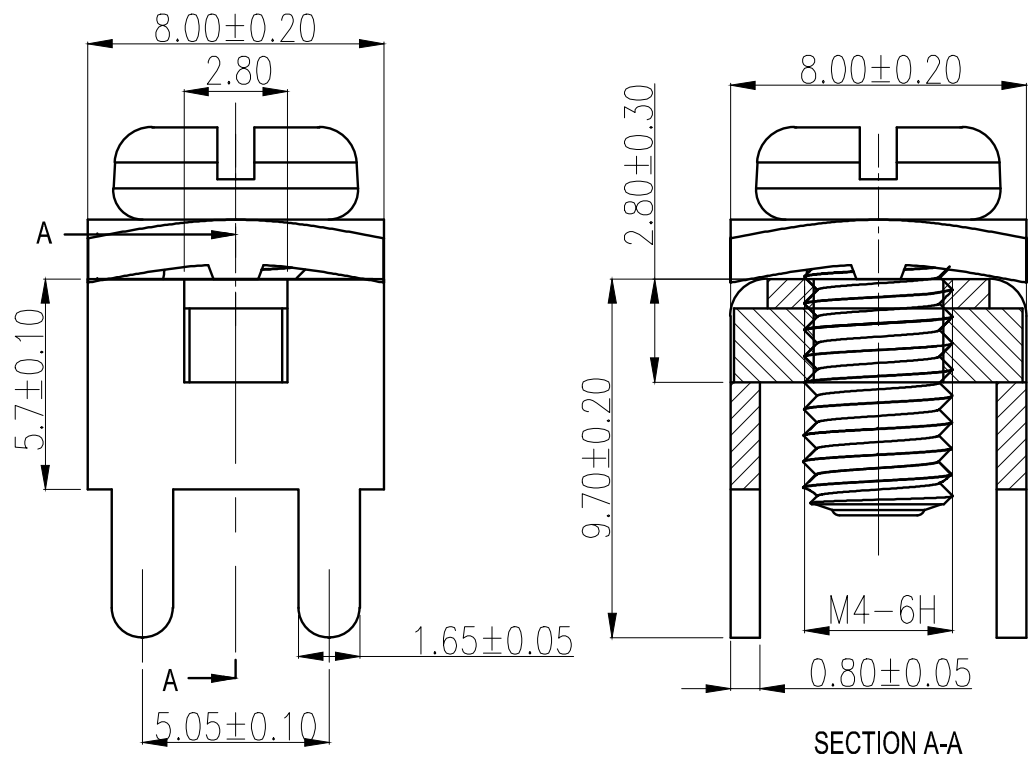

SECTION A-A

技术要求:

1. 材质: 黄铜, 厚度0.8mm.
2. 打铜底2um, 镀镍2um, 镀锡4um.
3. 螺牙扭力矩达到1.8N.m以上, 符合M4-6H的螺
4. 纹规检测, 螺牙不能有乱牙、豁牙、滑牙现象.
5. 不得有变形, 毛刺等缺陷.
6. 方垫铆好后不得有松动现象.
7. 适用线规格: 24-10AWG
8. 额定电流: 40A

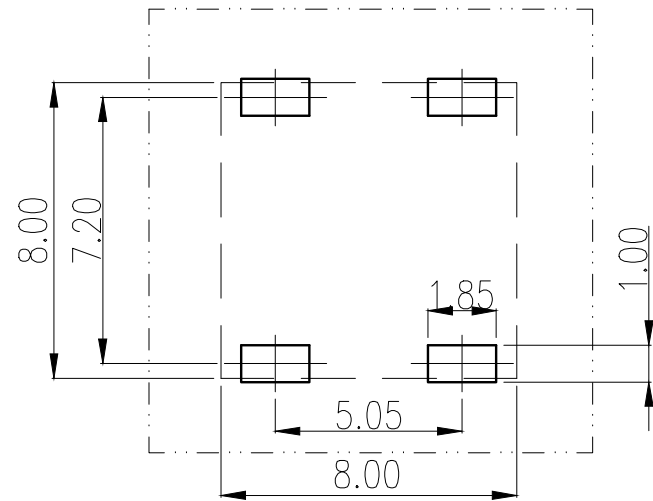

	pitch dimension			Nominal dimension					— □ ⌒
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

3	4*8-8*8环保蓝白锌	4*8-8*8ROSHLXB		碳钢	环保蓝白锌
2	方形垫片			碳钢	
1	ES. 05*8. 0*9. 7/4*M4-T-2			黄铜	镀雾锡
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZJL	DATE 2021/09/17	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	SHEET 1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	ES. 05*8. 0*9. 7/4*M4/8*8-T-2 ES. 05*8. 0*9. 7/4*M4/8*8-T-2产品