



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

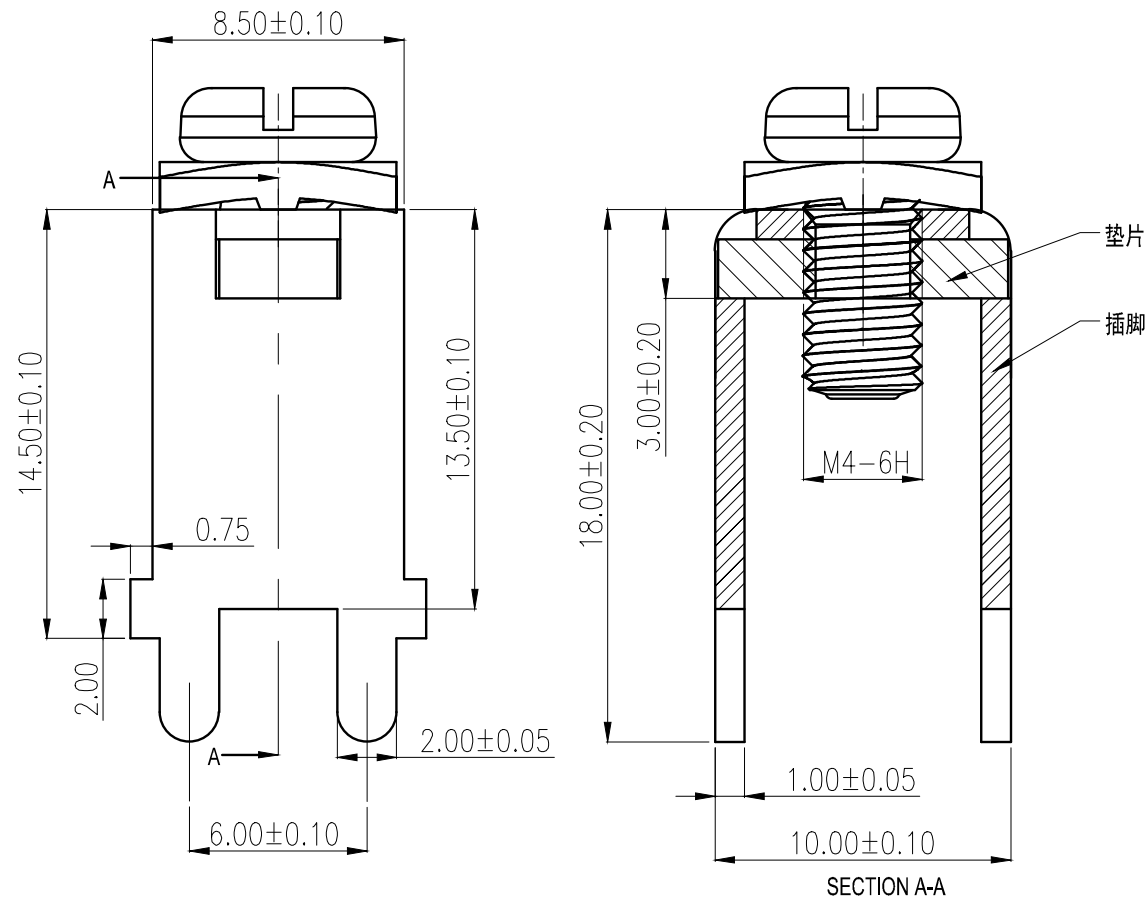

技术要求:

1. 材质: 黄铜, 厚度1mm.
2. 打铜底2um, 镀镍2um, 镀锡4um.
3. 螺牙扭力矩达到1.8N.m以上, 符合M4-6H的螺纹规检测, 螺牙不能有乱牙、豁牙、滑牙现象.
4. 不得有变形, 毛刺等缺陷.
5. 方垫铆好后不得有松动现象.
6. 适用线规格: 24-10AWG
7. 额定电流: 50A

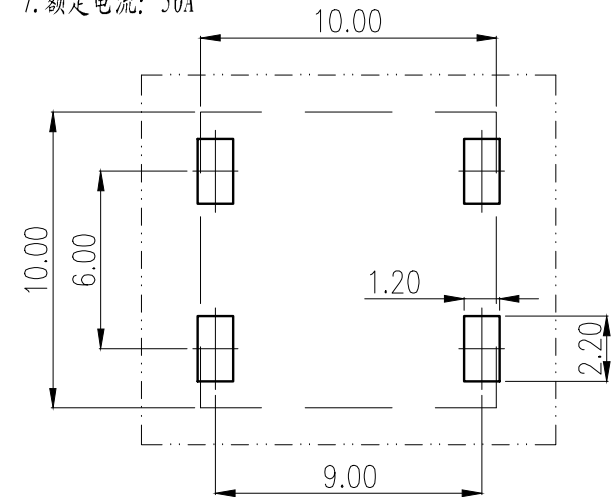

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

3	4*8-8*8环保蓝白锌	4*8-8*8ROSHLXB			环保蓝白锌
2	方形垫片			碳钢	
1	E6, 0*10, 0*18, 0/4+M4-T-1			黄铜	镀雾锡
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZJL	DATE 2021/09/17	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	SHEET 1 of 1	
APP.		DATE	SCALE 1:1	DWG NO. SP-2-7002001	REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	E6, 0*10, 0*18, 0/4+M4/8*8-T-1 E6, 0*10, 0*18, 0/4+M4/8*8-T-1产品