
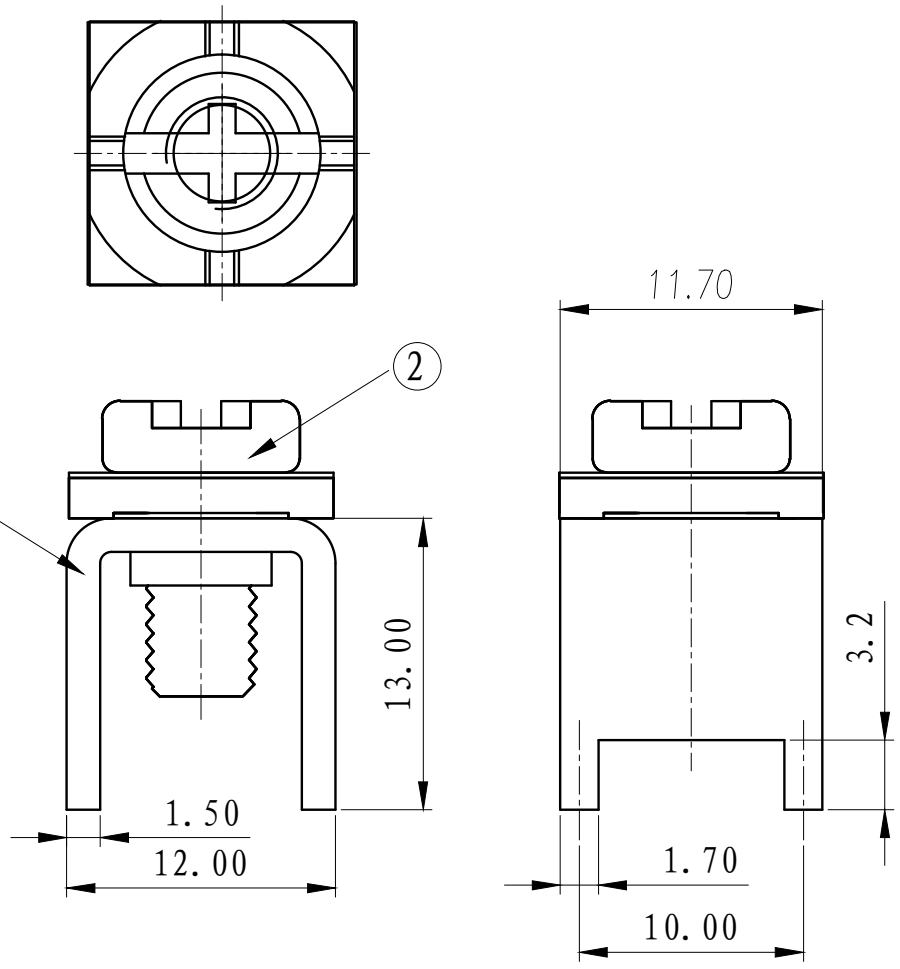


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

技术要求:

1. 螺钉孔类型/扭力: M5/2.0 N.m以上
2. 适用线规: 20~6AWG
3. 额定电流: 60A

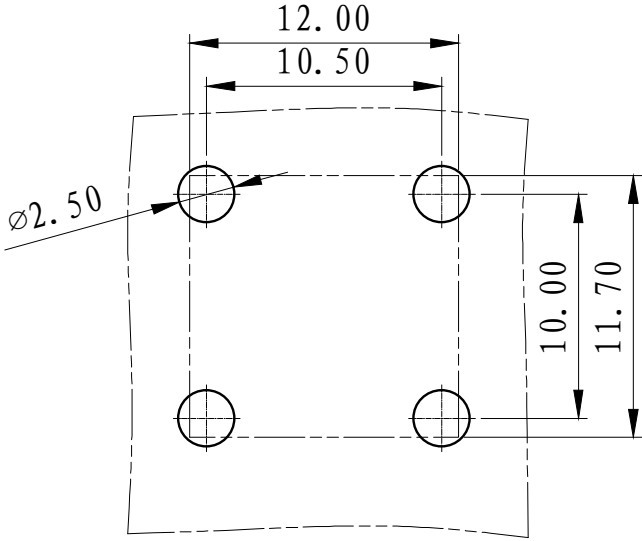

	pitch dimension			Nominal dimension					
variable range	over	over	over	over	over	over	over	over	—
	0	6	10	0	30	60	100	150	▱
	to	to	to	to	to	to	to	to	⤿
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	M5*10-(12.0*12.0)		1	碳钢	镀锌
1	E10.0*12.0*13.0/4-M5	7006T0001AV	1	黄铜	镀锡
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZMF	DATE 2019/04/11	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		SHEET 1 of 1
APP.		DATE	SCALE 1:1		REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	E10.0*12.0*13.0/4-M5/10*12-100-00A E10.0*12.0*13.0/4-M5/10*12-产品