

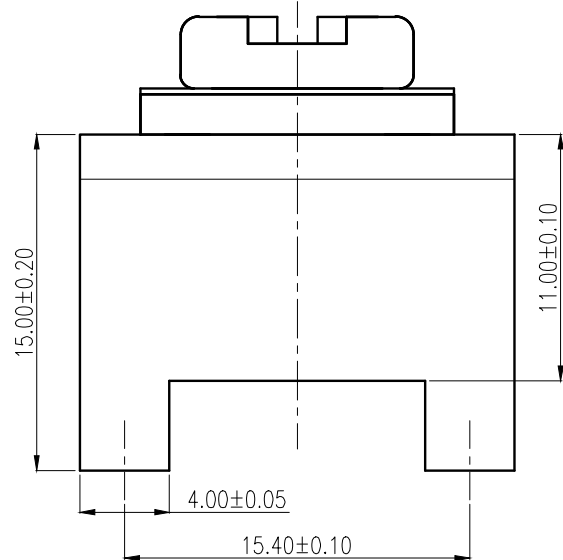
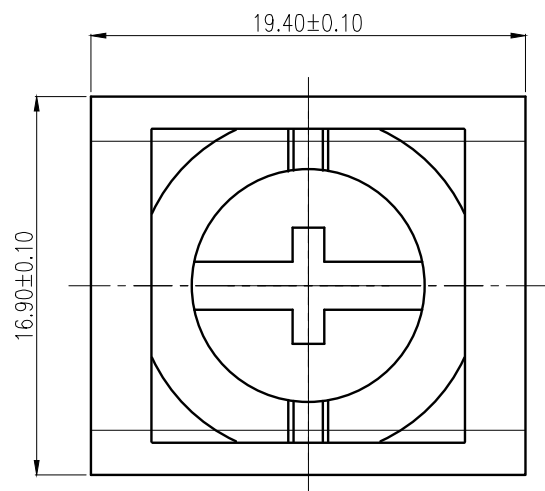


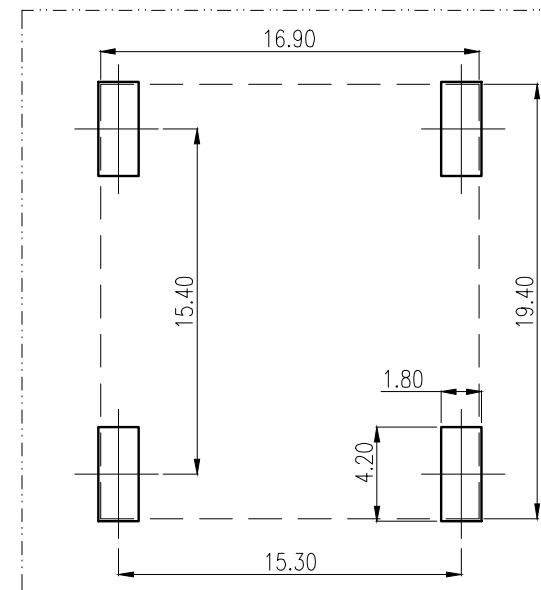

技术要求:

1. 材质: 黄铜, 厚度1.6mm.
2. 打铜底2um, 镀镍2um, 镀锡4um.
3. 螺牙扭力矩达到4N.m以上, 符合M6-6H的螺纹规检测, 螺牙不能有乱牙、豁牙、滑牙现象.
4. 不得有变形, 毛刺等缺陷.
6. 额定电流: 105A

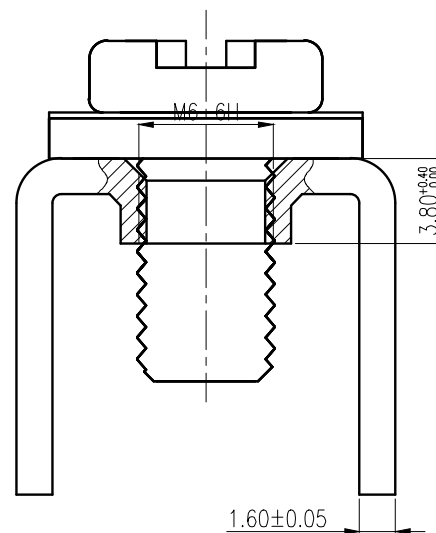

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	6*12-14*14	6*12-14*14		碳钢	镀镍
1	E15.4*19.4*15.0/4+M6			黄铜	镀锡
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZJL	DATE 2021/09/17	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	SHEET 1 of 1	
APP.		DATE	SCALE 1:1	DWG NO. SP-2-7002001	REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	E15.4*19.4*15.0/4+M6/12*14 E15.4*19.4*15.0/4+M6/12*14产品