


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

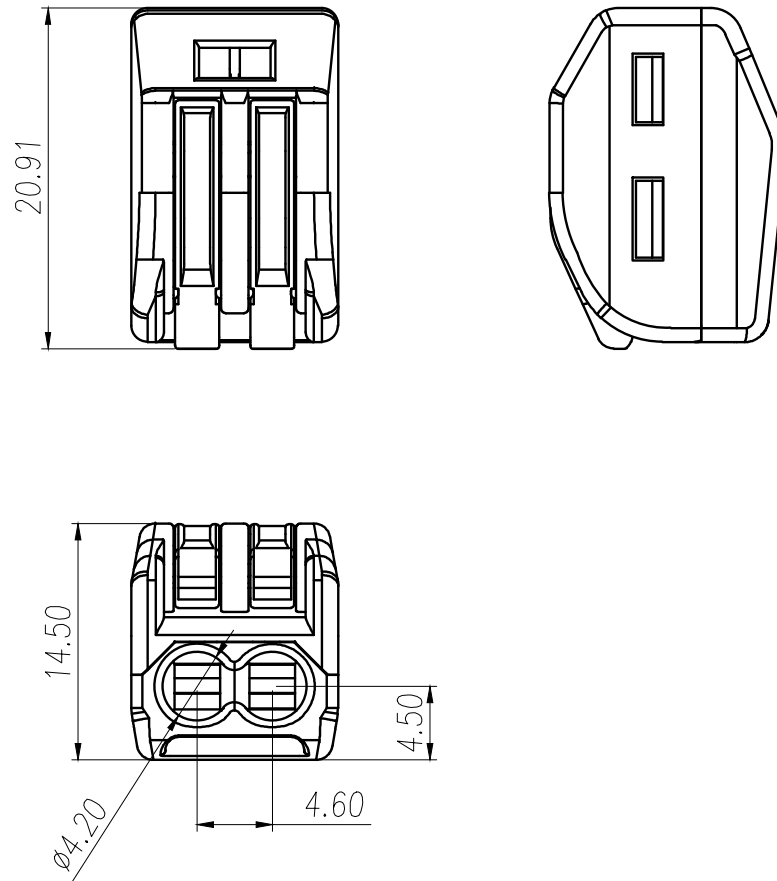

NOTES:

Pitch : 4.60mm
 Rated Voltage : 400V
 Rated Current : 32A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 500MΩ / DC500V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range : 28~ 14AWG

技术要求:

间距: 4.60mm
 额定电压: 400V
 额定电流: 32A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 28~14AWG

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	J2-导电件	60J2BDD032AV	P	黄铜	镀镍
4	J2-弹片	60J2TDD032AV	2P	不锈钢	
3	J2-手柄	60J200Y0323V	2P	PA66-V0	
2	J2-盖板	60J2C910323V	1	PA66-V0	
1	J2-本体	60J2A910323V	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	WY	DATE	2022/06/21	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric Co., Ltd				TITLE	J2-1120-00A
					J2-1120-成品