



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

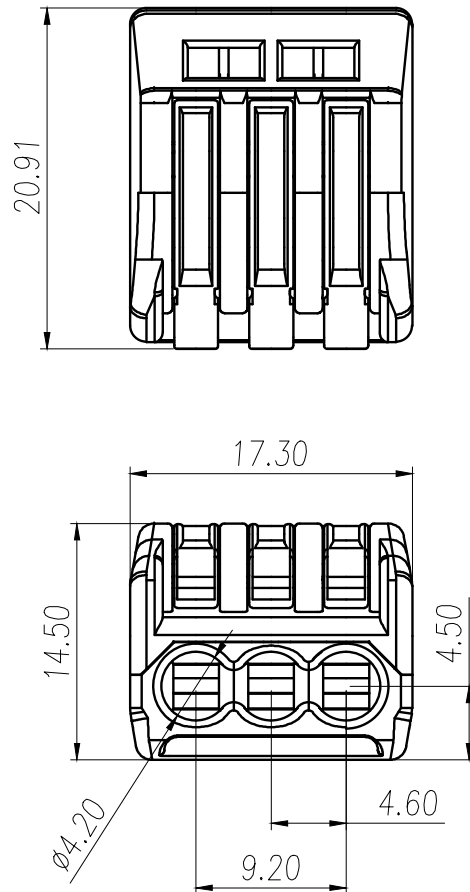

NOTES:

Pitch : 4.60mm
Rated Voltage : 400V
Rated Current : 32A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 28~ 14AWG

技术要求:

间距: 4.60mm
额定电压: 400V
额定电流: 32A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 28~14AWG

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	J3-导电件	60J3BDD032AV	1	黄铜	镀镍
4	J2-弹片	60J2BDD032AV	3	不锈钢	
3	J2-手柄	60J200Y0323V	3	PA66-V0	
2	J3-盖板	60J3C910323V	1	PA66-V0	
1	J3-本体	60J3A910323V	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	WY	DATE	2022/06/21	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD				THIRD ANGLE PROJECTION	
				SHEET	
				DWG NO.	SP-2-4022001
				REV:	V0
				TITLE	J3-1120-00A
					J3-1120-成品