


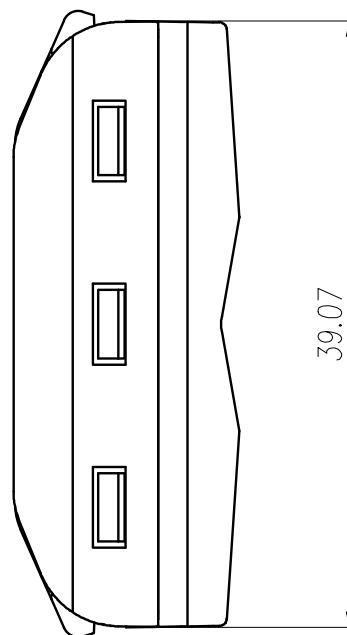

	pitch dimension			Nominal dimension					—
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	 
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

NOTES:

Pitch : 5.0mm

Rated Voltage : 250V

Rated Current : 32A

Withstand Voltage :

AC2500V for 1 minute

Insulation Resistance :

500MΩ / DC500V

Using Temperature Range :

- 40°C ~ + 105°C

Wire range : 24~ 14AWG

技术要求:

间距: 5.0mm

额定电压: 250V


额定电流: 32A

耐电压值: AC2500V/min

绝缘阻抗: 500MΩ/DC500V

使用条件: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$

适用线规: 24~14AWG

5	J2-2-导电件		60J2BDD032AV-1		P	黄铜	镀镍	
4	J2-2-弹片		60J2TDD032AV-1		2P	不锈钢		
3	J2-2-手柄		60J200Y0323V-1		2P	PA66-V0		
2	J2-2-盖板		60J3C910323V-1		1	PA66-V0		
1	J2-2-本体		60J3A910323V-1		1	PA66-V0		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	WY	DATE	2022/06/21	UNITS	MM			SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-4022001	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD						TITLE		J2-2-1120-00A
								J2-2-1120-成品