
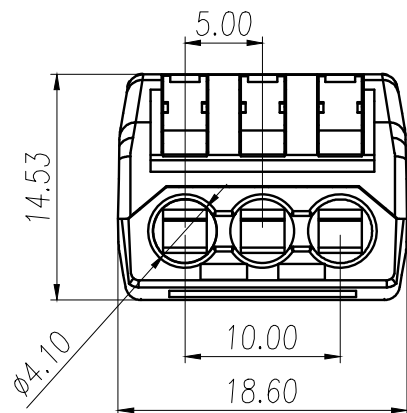


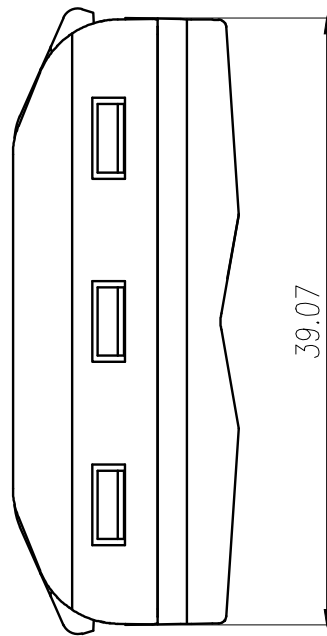

	pitch dimension			Nominal dimension					—	
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	 	
	Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版発行		

Pitch : 5.0mm
Rated Voltage : 250V
Rated Current : 32A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 24~ 14AWG

间距: 5.0mm
额定电压: 250V
额定电流: 32A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 24~14AWG

5	J2-2-导电线	60J2BDD032AV-1	P	黄铜	镀镍
4	J2-2-弹片	60J2TDD032AV-1	2P	不锈钢	
3	J2-2-手柄	60J200Y0323V-1	2P	PA66-V0	
2	J3-3-盖板	60J3C910323V-1	1	PA66-V0	
1	J3-3-本体	60J3A910323V-1	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WY	DATE	2022/06/21	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
 上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD				TITLE	J3-3-11MC-00A
					J3-3-11MC-成品