
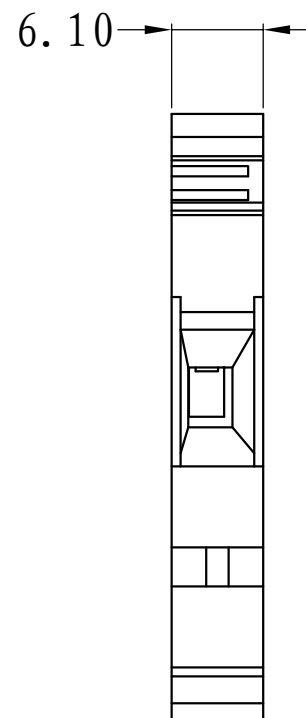
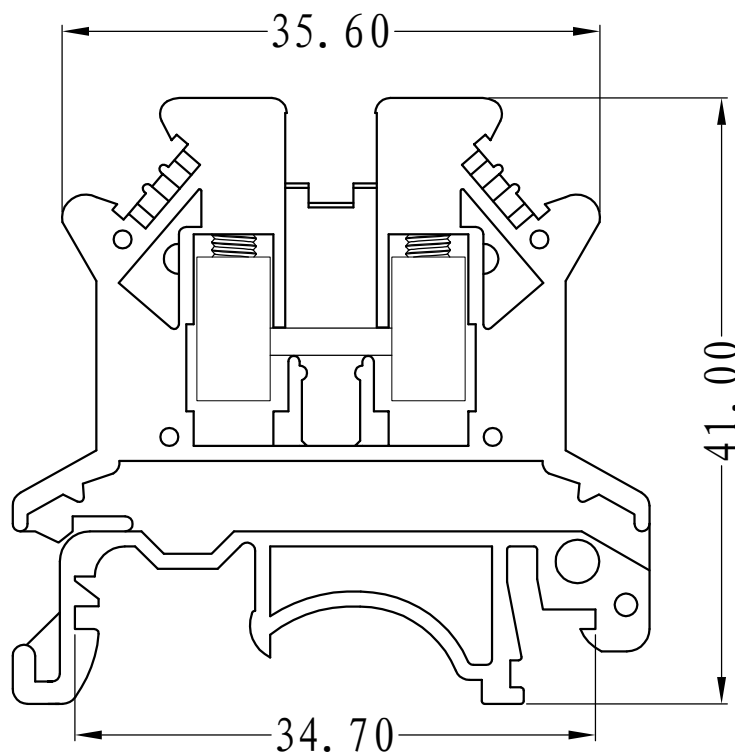


REVISION RECORD			
REV.	CONTENT	MOD.	DATE

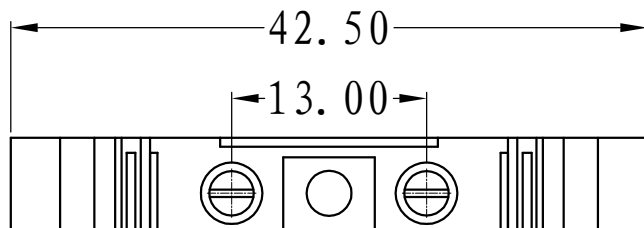

技术要求:
极数: 组装
额定电压: 690V
额定电流: 32A
螺钉类型/扭力: M3/0.6-0.8
绝缘材料类型: PA66
阻燃等级: V0
刚柔性导线: 0.2-4/0.2-2.5mm²

	pitch dimension			Naminl dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	UK2.5B-螺丝	SSM0300070V	2	合金铜	镀锌
3	UK2.5B-铜方块	F000000140V	2	黄铜	镀镍
2	UK2.5B-导电件	6005B00010V	1	紫铜	镀镍
1	UK2.5B-本体	6005A1001AV	1	PA	灰色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2012/05/25	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-6005001 REV: T1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	UK2.5B-110-00A UK2.5B-成品