


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

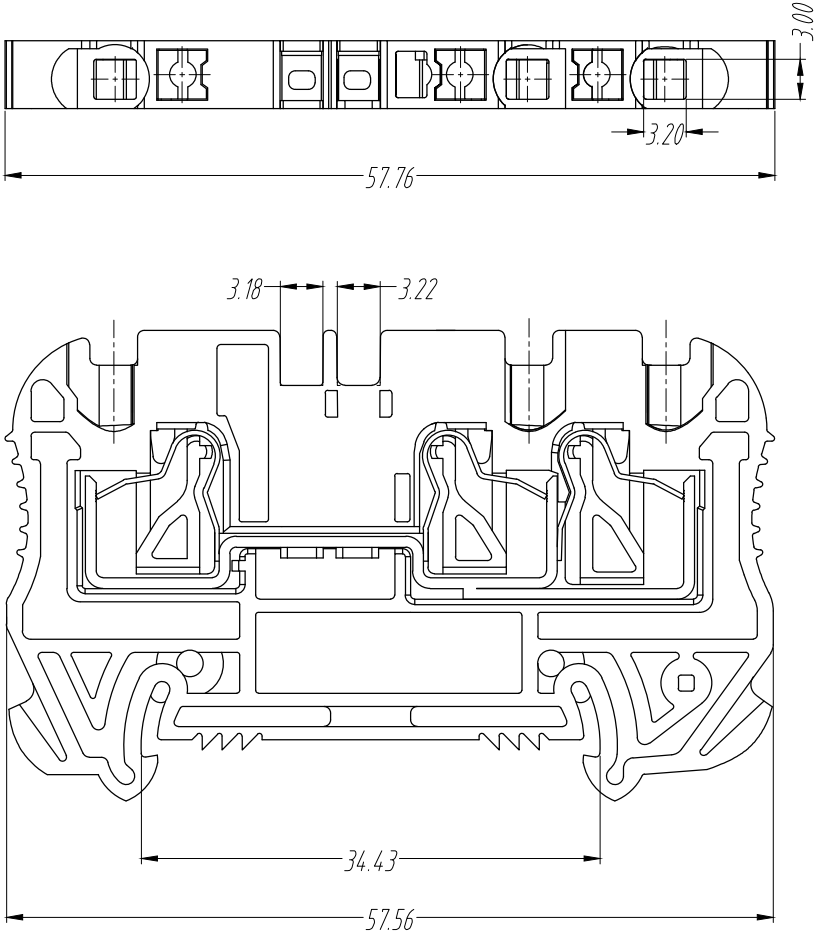

NOTES:


Voltage Rating: 800V, Current Rating: 24A

PITCH: 5.08mm

Insulation Withstands Voltage: AC2500V/min

Using Temperature Range:-60℃~+110℃

Suitable Electric Wire: 24-12 AWG

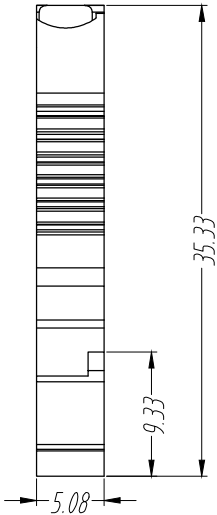

技术要求:

1. 额定电压：800V，额定电流：24A
2. 间距：5.08mm
3. 耐电压值：AC2500V/min
4. 使用条件：-60° - +110°
5. 适用线规：24-12 AWG

	pitch dimension			Naminal dimension					— ▱ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LD1-2.5弹片	6LD1B0001AV	3	SUS301	
3	LD1-2.5按钮	6LD1A400204V	3	PA66-V0	橘黄
2	UD2.5-3导电件	60UD3BDD024AV	1	紫铜	镀亮锡
1	UD2.5-3主体	60UD3A100240V	1	PA66	灰色
NO.	NAME OF PART	NO. OF PART		MATERIAL	NOTES
DES.	CMZ	DATE 2024/07/23	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		SHEET 1 of 1
APP.		DATE	SCALE 1: 1		
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	UD-2.5/3L-110-00A
					UD-2.5/3L-110-00A产品