



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

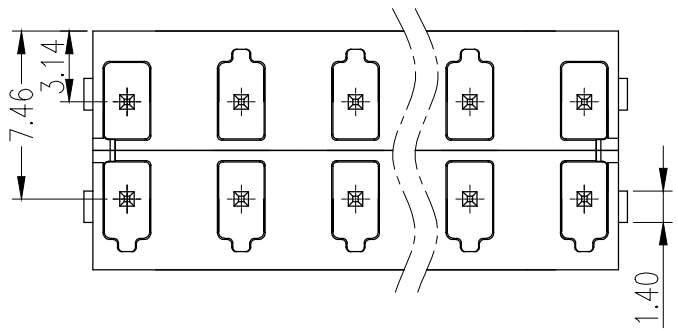

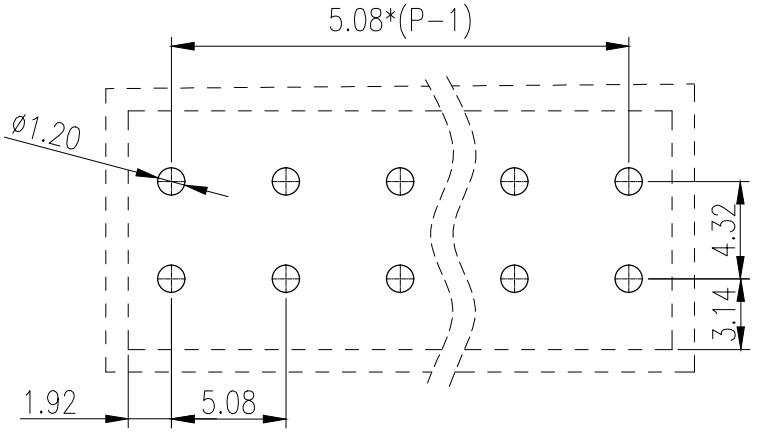

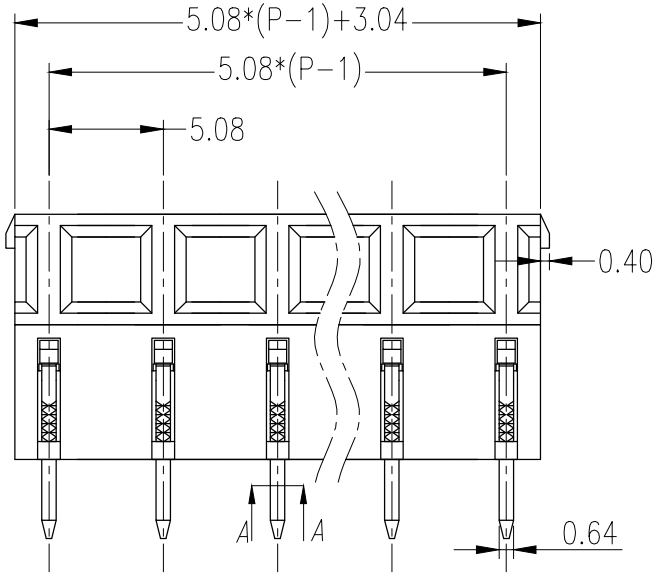

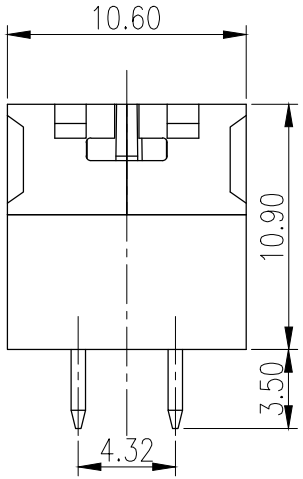


NOTES:

1. Voltage Rating: 300V, Current Rating: 6A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range: -40℃ ~ +105℃

技术要求:

1. 额定电压: 300V, 额定电流: 6A
2. 间距: 5.08mm
3. 耐电压值: AC 2000V/min
4. 使用条件: -40℃ ~ +105℃

	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	— / ▱ / ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
3	LZ4-2.54直针-1	1008B0003AV-1	2P	黄铜	镀锡
2	LZ4X-5.08主体	1203A0YXXAV	1	PA66	
1	LZ8X-5.08主体	1200A0YXXAV	2	PA66	

DES.	CMZ	DATE	24/12/06	UNITS	mm	THIRD ANGLE PROJECTION	SHEET 1 of 1
CHK.	HH	DATE	24/12/06	SIZE	A4		
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-1172001 REV: V0

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE: LZ4XV-5.08-2*XXP-1Y/1Y-00A
LZ4XV-5.08-成品