
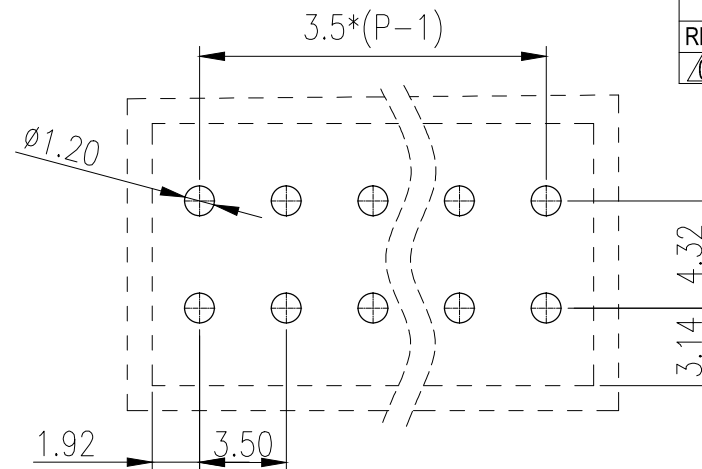


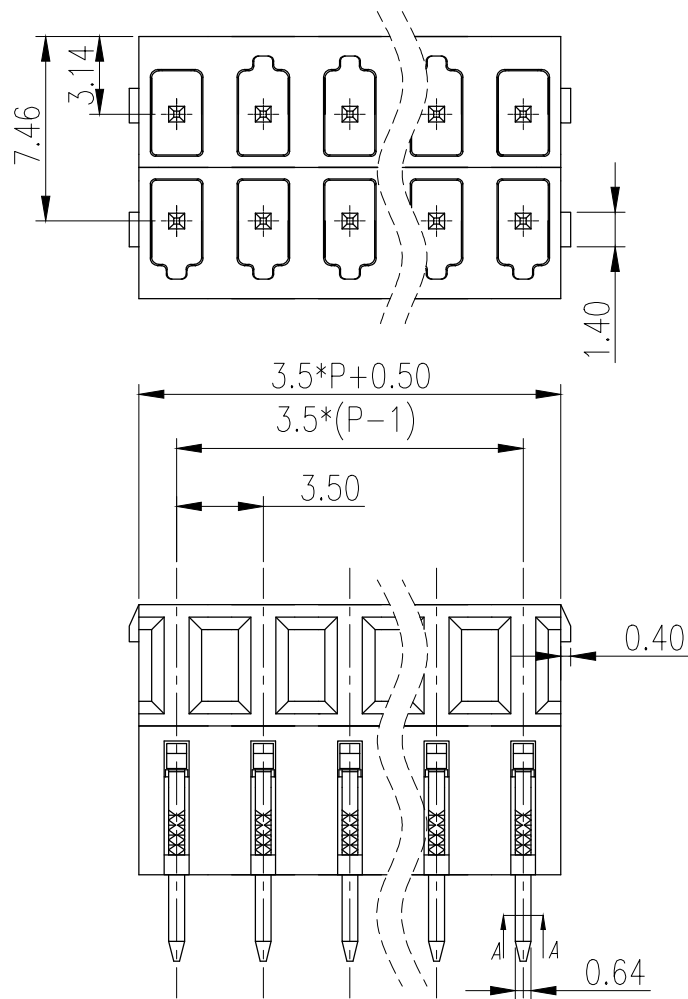



NOTES:

1. Voltage Rating: 300V, Current Rating: 6A
2. PITCH: 3.5mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range: -40°C ~ +105°C

技术要求:


1. 额定电压: 300V, 额定电流: 6A
2. 间距: 3.5mm
3. 耐电压值: AC 2000V/min
4. 使用条件: -40°C ~ +105°C

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

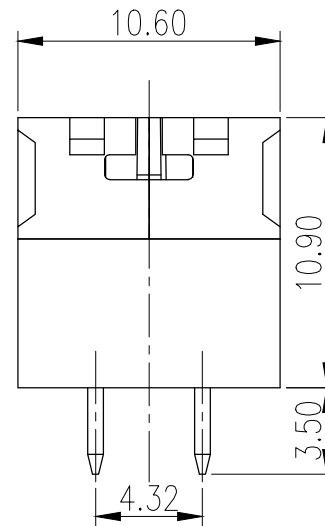


3	LZ4-2.54直针-1	1008B0003AV-1	2P	黄铜	镀锡
2	LZ4X-3.5主体	1201A0YXXAV	1	PA66	
1	LZ8X-3.5-主体	1198A0YXXAV	2	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	24/12/03	UNITS	mm
CHK.	HH	DATE	24/12/03	SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-1172001
				REV:	V0
				TITLE	LZ4XV-3.5-2*XXP-1Y/1Y-00A
					LZ4XV-3.5-成品

REV.	CONTENT	MOD.	DATE
0	初版发行		

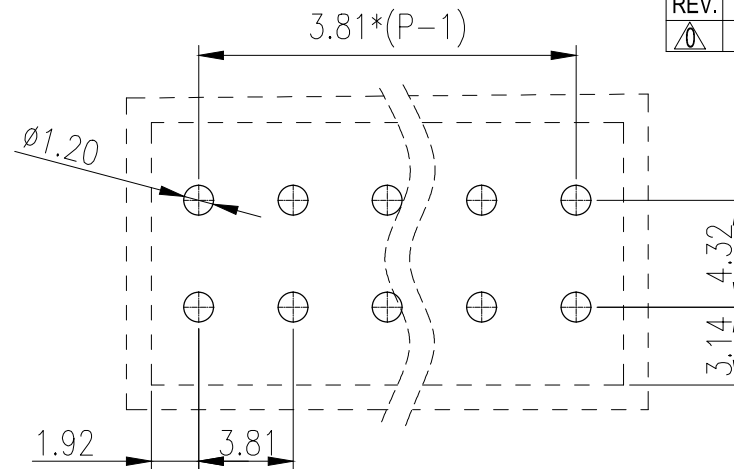


1. Voltage Rating: 300V, Current Rating: 6A
2. PITCH: 3.81mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range: -40°C ~ +105°C

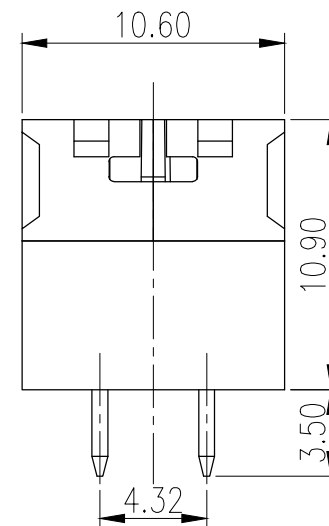

1. 额定电压: 300V, 额定电流: 6A
2. 间距: 3.81mm
3. 耐电压值: AC 2000V/min
4. 使用条件: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

	pitch dimension			Nominal dimension					—
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



3	LZ4-2.54直针-1		1008B0003AV-1		2P	黄铜	镀锡
2	LZ4X-3.81主体		1202A0YXXAV		1	PA66	
1	LZ8X-3.81主体		1199A0YXXAV		2	PA66	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	24/12/04	UNITS	mm	THIRD ANGLE PROJECTION	SHEET
CHK.	HH	DATE	24/12/04	SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-1172001 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE	LZ4XV-3.81-2*XP-1Y/1Y-00A
							LZ4XV-3.81-成品