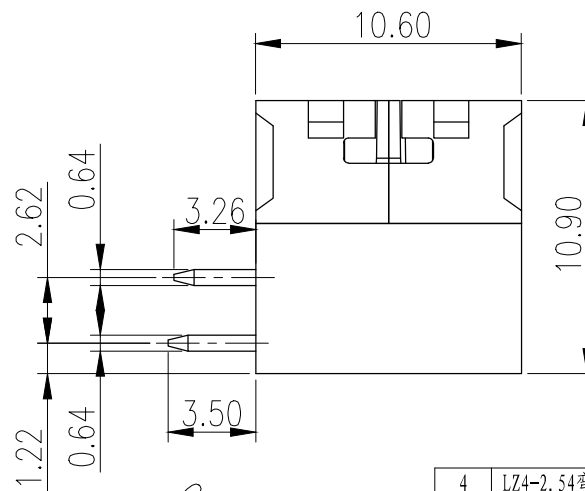
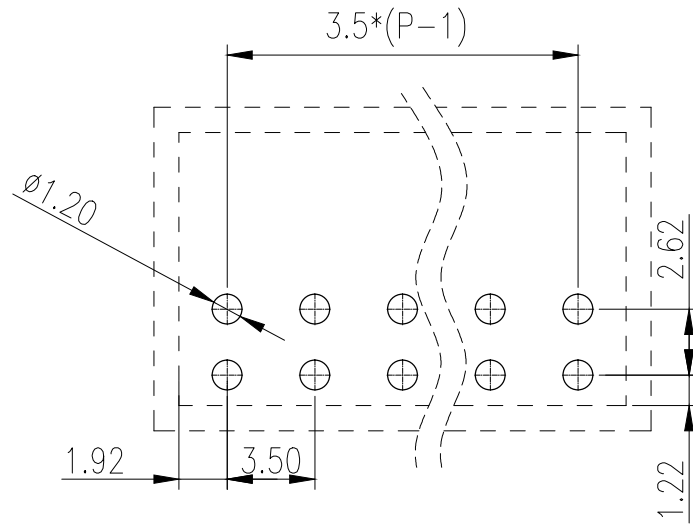
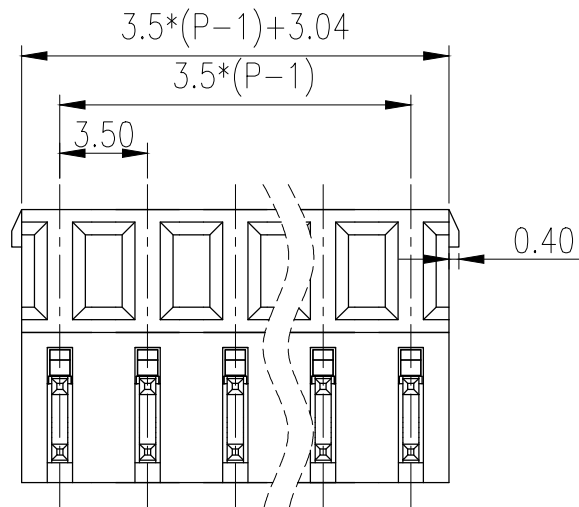
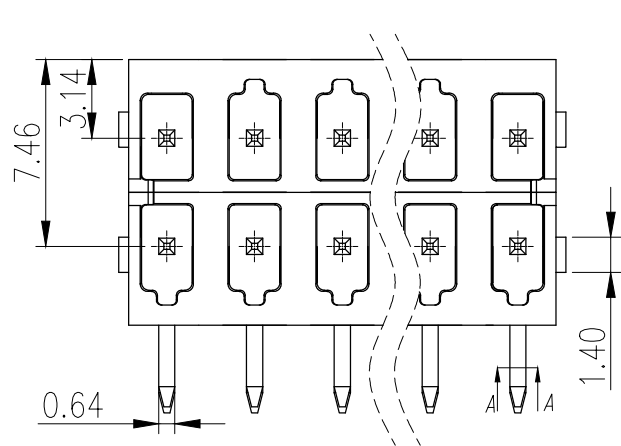


REVISION RECORD

REV.	CONTENT	MOD.	DATE
1	初版发行		

NOTES:

1. Voltage Rating: 300V, Current Rating: 6A
2. PITCH: 3.5mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range: -40℃ ~ +105℃

技术要求:

1. 额定电压: 300V, 额定电流: 6A
2. 间距: 3.5mm
3. 耐电压值: AC 2000V/min
4. 使用条件: -40℃ ~ +105℃

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		—
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LZ4-2.54弯针-1	1008B0002AV-1	P	黄铜	镀锡
3	LZ8-2.54弯针	1008B0004AV	P	黄铜	镀锡
2	LZ4X-3.5主体	1201A0YXXAV	1	PA66	
1	LZ8X-3.5主体	1198A0YXXAV	2	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	24/12/03	UNITS	mm
CHK.	HH	DATE	24/12/03	SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ4XR-3.5-2*XXP-1Y/1Y-00A
					LZ4XR-3.5-成品

