
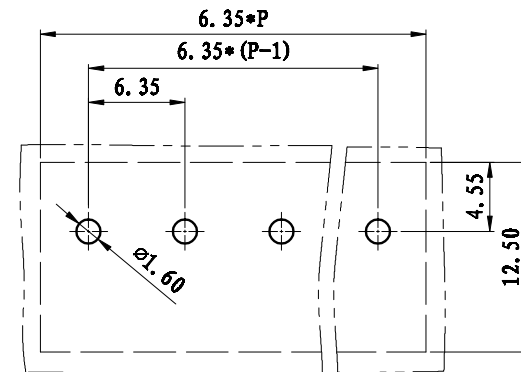
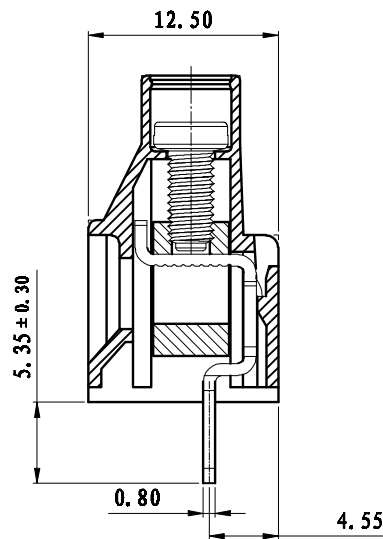
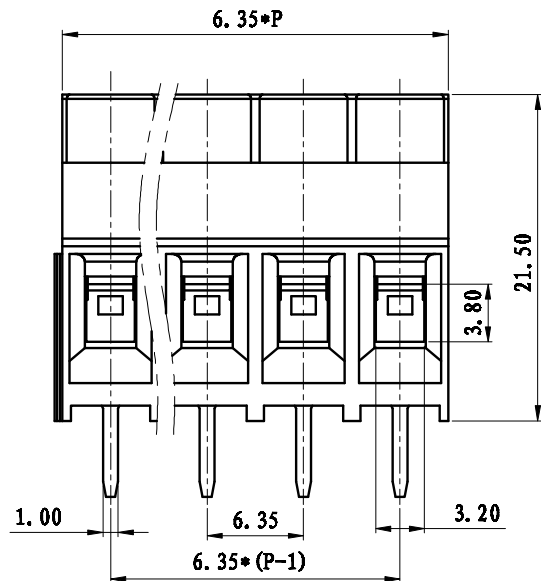


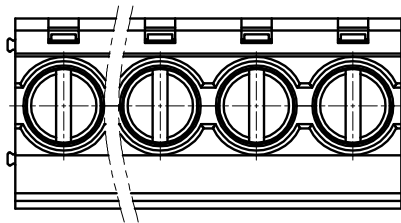

REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
1	初版发行		

NOTES:

Pitch : 6.35mm
Rated Voltage : 300V
Rated Current : 30 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MQ / DC500V
Using Temperature Range :
-40℃ ~ +105℃
Wire range : 24~10 AWG
Screw Torque Value : 0.5Nm

技术要求:

间距: 6.35mm
额定电压: 300V
额定电流: 30A
耐电压值: AC2500V/min
绝缘电阻: 500MQ/DC500V
使用条件: -40℃~+105℃
适用线规: 24~10 AWG
螺丝扭矩: 0.5Nm

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LG636-铜方块		F1A0BLG6363V		P	黄铜	镀锌
3	M3*6.6(一字)		SPQFA306601V		P	碳钢	三价钝化彩锌
2	LG636-焊脚		2013B0001AV		P	黄铜	镀雾锡
1	LG635-6.35-本体(带插板)		2016A0YXAVP		1	PA66-70	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-05-10	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1		DWG NO.
 上海联捷电气有限公司 Shanghai Blinker Electric CO.,LTD						TITLE	LG635-6.35-XIP-1Y-00A
							LG635-6.35-成品(新模)