

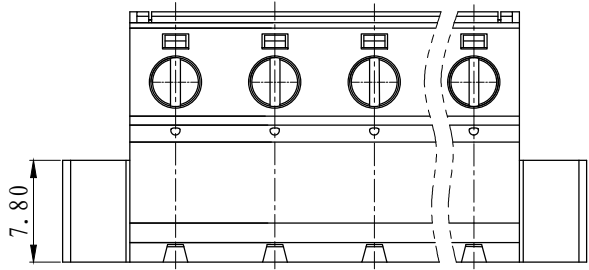


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

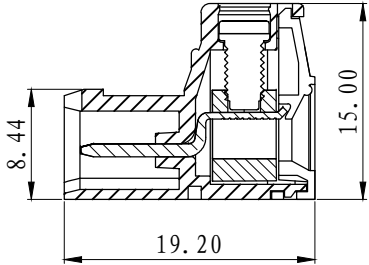

NOTES:
Pitch : 7.62mm
Rated Voltage : 400V
Rated Current : 15A
Withstand Voltage :AC2500V for 1 minute
Using Temperature Range : - 40℃ ~ + 105℃
Wire range : 24~12 AWG
Screw Torque Value : 0.5 N.m

技术要求:
间距: 7.62mm
额定电压: 400V
额定电流: 15A
耐压值: AC2500V/min
使用条件: -40℃~+105℃
适用线规: 24~12 AWG
螺丝扭矩: 0.5 N.m

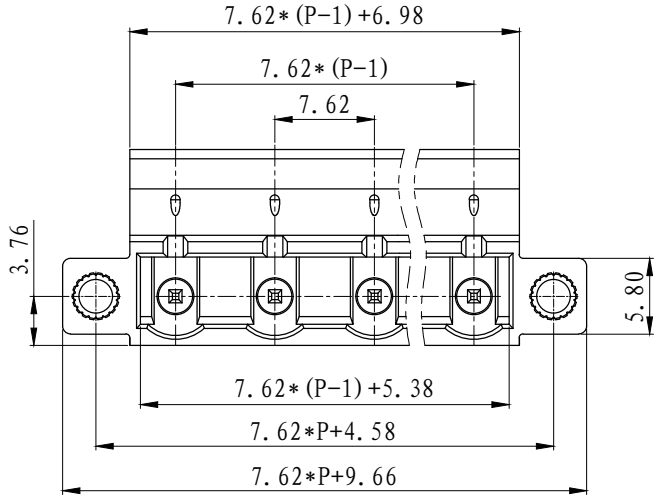

	pitch dimension			Nominal dimension					—
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6.	LZ1-耳朵螺母		SM00B250000V		2	黄铜		
5.	LC10-5.08-焊脚		1011B00010V		P	紫铜	镀雾锡	
4.	LC1-5.08-螺丝		SP0YA305301V		P	碳钢	三价铬钝化彩锌	
3.	LC1-5.08-铜方块		F1A0BLC5083V		P	黄铜	镀镍	
2.	LC1-7.62-盖板		1007C0YXXAV		1	PA66-V0		
1.	LC10MG-7.62-本体		1138N0VXXAV		1	PA66-V0		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	CMZ	DATE	2024/11/23	UNITS	MM	THIRD ANGLE PROJECTION 	SHEET	
CHK.	HH	DATE	2024/11/23	SIZE	A4		1 of 1	
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-1132001	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD						TITLE	LC10MG-7.62-XXP-1Y-00A	
							LC10MG-7.62-成品	