

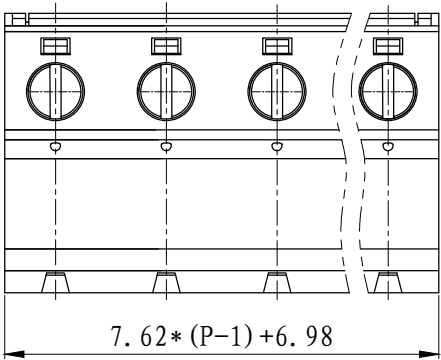


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

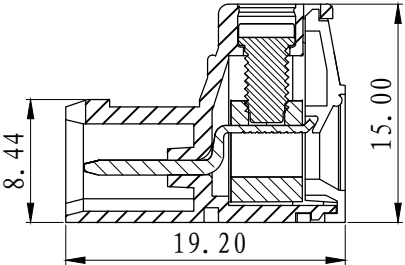

NOTES:
 Pitch : 7.62mm
 Rated Voltage : 400V
 Rated Current : 15A
 Withstand Voltage :AC2500V for 1 minute
 Using Temperature Range : - 40℃ ~ + 105℃
 Wire range : 24~12 AWG
 Screw Torque Value : 0.5 N.m

技术要求:
 间距: 7.62mm
 额定电压: 400V
 额定电流: 15A
 耐压值: AC2500V/min
 使用条件: -40℃~+105℃
 适用线规: 24~12 AWG
 螺丝扭矩: 0.5 N.m

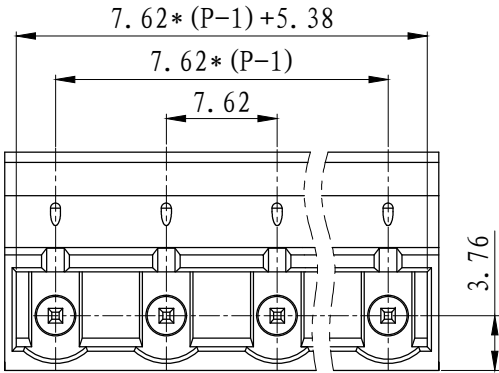

	pitch dimension			Naminal dimension					— ◇ ⌒
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5.	LC10-5.08-焊脚		1011B00010V		P	紫铜	镀雾锡
4.	LC1-5.08-螺丝		SP0YA305301V		P	碳钢	三价铬钝化彩锌
3.	LC1-5.08-铜方块		F1A0BLC5083V		P	黄铜	镀镍
2.	LC1-7.62-盖板		1007C0YXXAV		1	PA66-V0	
1.	LC10-7.62-本体		1132A0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE	24/11/23	UNITS	MM		SHEET
CHK.	HH	DATE	24/11/23	SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1		
 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD						TITLE	LC10-7.62-XXP-1Y-00A
							LC10-7.62-成品