
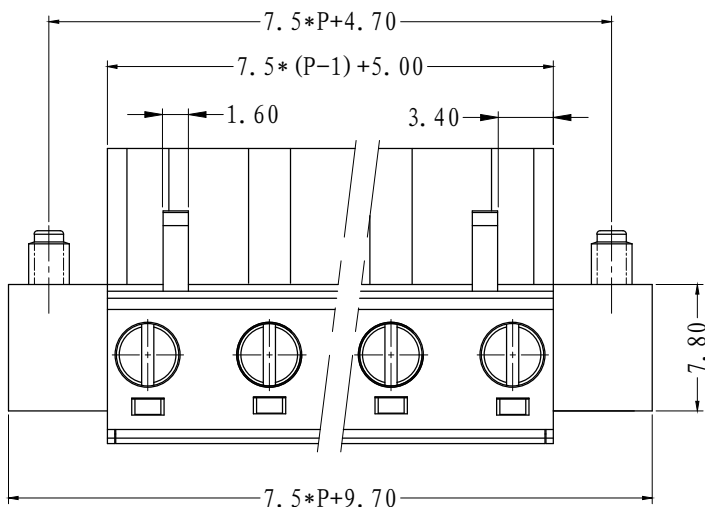


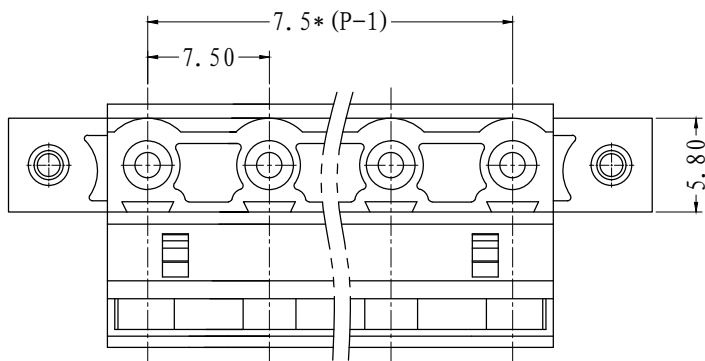


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:

Pitch : 7.5mm
Rated Voltage : 400V
Rated Current : 15A
Withstand Voltage :
AC2500V for 1 minute
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 28~12 AWG
Screw Torque Value : 0.5Nm

技术要求:

间距: 7.5mm
额定电压: 400V
额定电流: 15A
耐电压值: AC2500V/min
使用条件: -40℃~+105℃
适用线规: 28~ 12AWG
螺丝扭矩: 0.5Nm

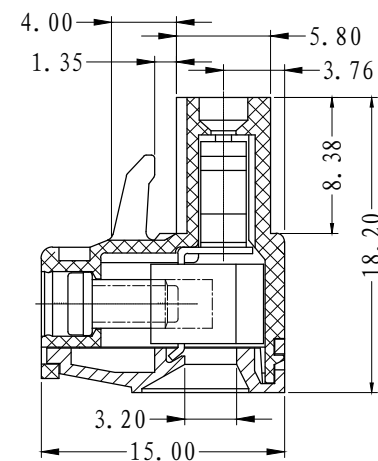

6	LC1-耳朵螺丝	SP0YA255301V	2	碳钢	三价铬钝化彩锌
5	LC1-5.08-夹子	1001B0001AV	P	磷青铜	镀镍
4	LC1-5.08-螺丝	SP0YA305301V	P	碳钢	三价铬钝化彩锌
3	LC1-5.08-铜方块	F1A0BLC5083V	P	黄铜	镀镍
2	LC1-7.5-盖板	1124C0YXXAV	1	PA66	
1	LC1M-7.5-主体	1124M0YXXAV	1	PA66	

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	24/11/21	UNITS	mm
CHK.	HH	DATE	24/11/21	SIZE	A4
APP.		DATE		SCALE	1:1



上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE

LC1M-7.5-XXP-1Y-00A
LC1M-7.5-成品



	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		



- NOTES:
- 1. Voltage Rating: 400V, Current Rating: 15A
 - 2. PITCH: 7.62mm
 - 3. Insulation Withstands Voltage: AC2500V/min
 - 4. Using Temperature Range:-40° C - +105° C
 - 5. Suitable Electric Wire:28-12AWG
 - 6. Screw Torque Value: 0.5N.m

技术要求:


- 1. 额定电压: 400V, 额定电流: 15A
- 2. 间距: 7.62mm
- 3. 耐电压值: AC 2500V/min
- 4. 使用条件: -40° - +105°
- 5. 适用线规: 28-12AWG
- 6. 螺丝扭力: 0.5N.m

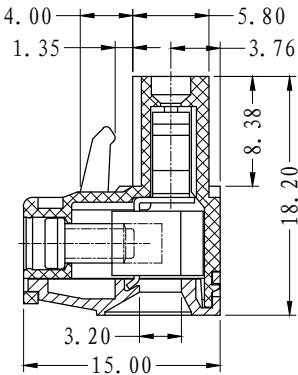

6.	LC1-耳朵螺丝	SP0YA255301V	2	碳钢	三价铬钝化彩锌
5.	LC1-5.08-夹子	1001B0001AV	P	磷青铜	镀镍
4.	LC1-5.08-铜方块	F1A0BLC5083V	P	黄铜	镀镍
3.	LC1-5.08-螺丝	SP0YA305301V	P	碳钢	三价铬钝化彩锌
2.	LC1-7.62-盖子	1007C0YXXAV	1	PA66-V0	
1.	LC1-7.62-本体	1007M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE	2024/08/03	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD	
TITLE				LC1M-7.62-XXP-1Y-00A LC1M-7.62-成品	

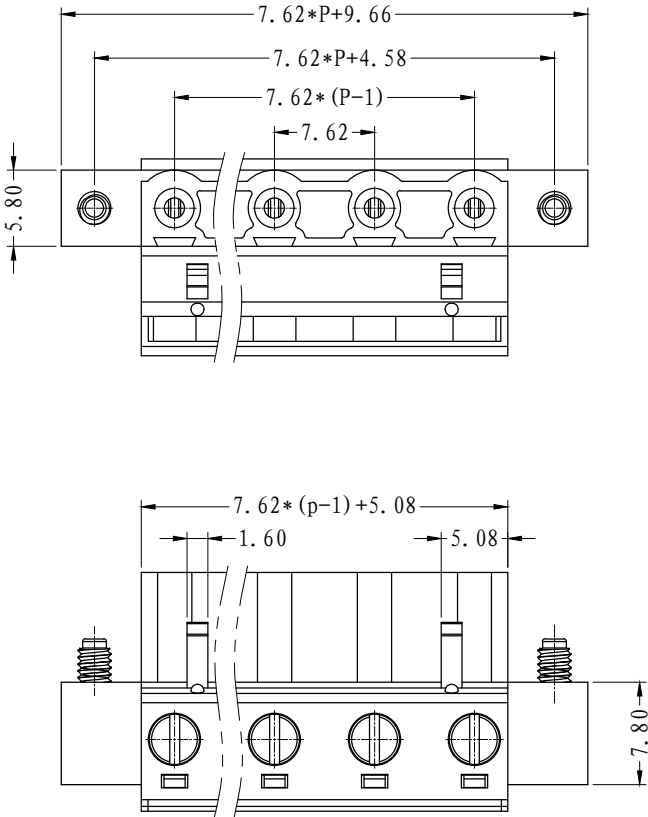

2P-双卡扣



2P-单卡扣

	pitch dimension			Naminal dimension					— —
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10