
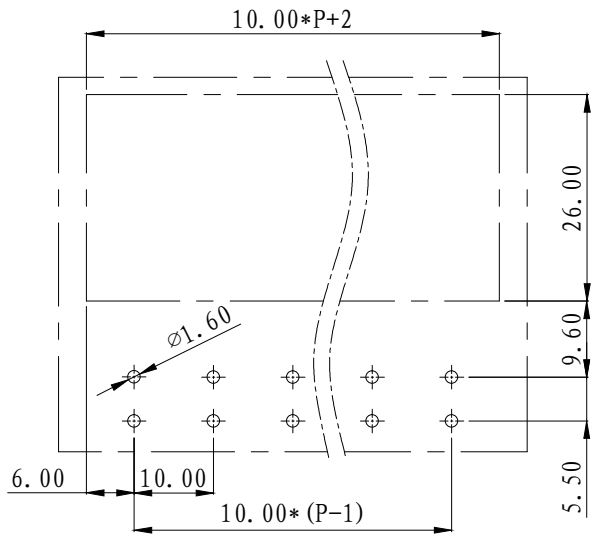
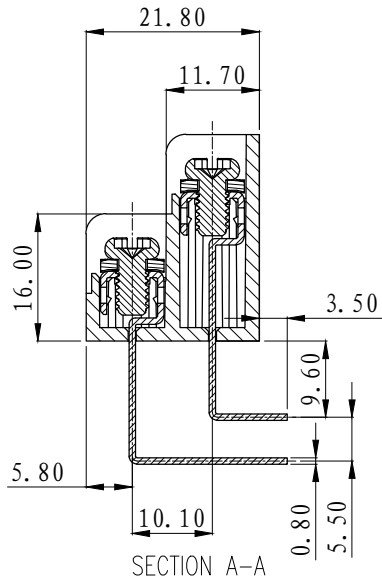


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

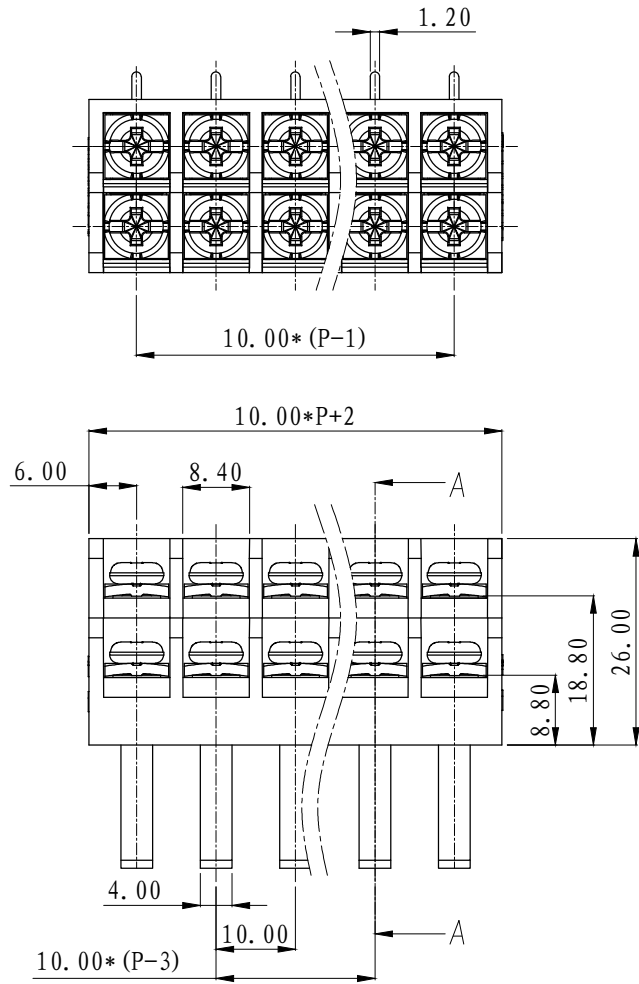

NOTES:

Pitch : 10.0mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Using Temperature Range :
- 40℃ ~ + 130℃
Wire range : 22~12 AWG
Screw Torque Value : 1.2Nm

技术要求:

间距: 10.0mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	M4*7-8*8	SPFFA407053V	2P	碳钢	镀镍
3	LW6R1-10.0-短焊脚	5029B0001AV	P	黄铜	镀雾锡
2	LW6R1-10.0-长焊脚	5029B0002AV	P	黄铜	镀雾锡
1	LW6-10.0-主体	5029A0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2024/11/12	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.	HH	DATE 2024/11/12	SIZE A4		1 of 1
APP.		DATE	SCALE	DWG NO.	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LW6R-10.0-XXP-1Y-00A
					LW6R-10.0-成品