
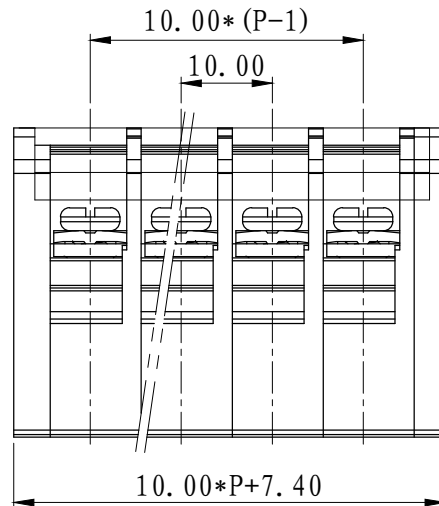


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

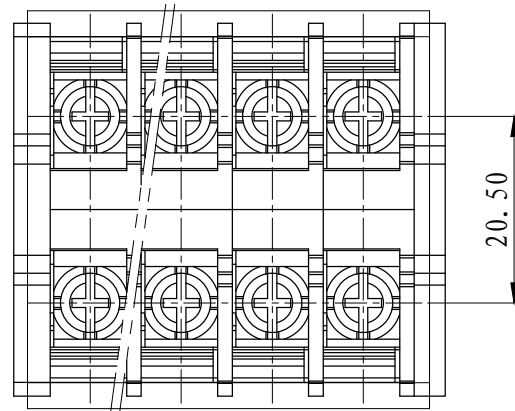

技术要求:

额定电压: 660V


额定电流: 25A

螺钉类型/扭力: M4/1.2N.m

绝缘材料类型: PC

阻燃等级: V1

导线截面: 2.5mm²

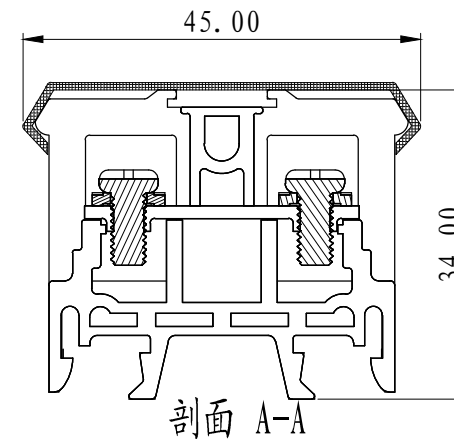

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ⤿
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	JHY1-25A-防护罩	6009C00010V	1	PC	透明
4	TBC-20A-螺丝	SSD0400010V	2P	碳钢	镀锌
3	JHY1-25A-导电件	6009B00010V	P	黄铜	镀镍
2	JHY1-25A-端板	6009C30XXAV	2	PC	黑色
1	JHY1-25A-本体	6009A30XXAV	P	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/11/02	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	6009A30
				TITLE	JHY1-25AXX-130-00A JHY1-25A-成品



上海联捷电气有限公司
Shanghai Elinker Electric CO., LTD

THIRD ANGLE PROJECTION
SHEET
1 of 1
REV: T0