




REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

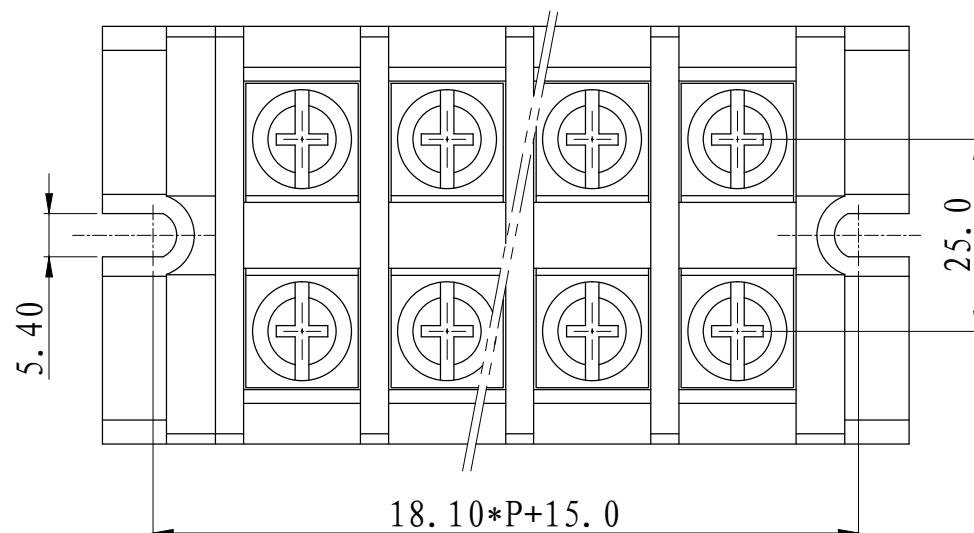

备注：端子上面有透明(防护罩)

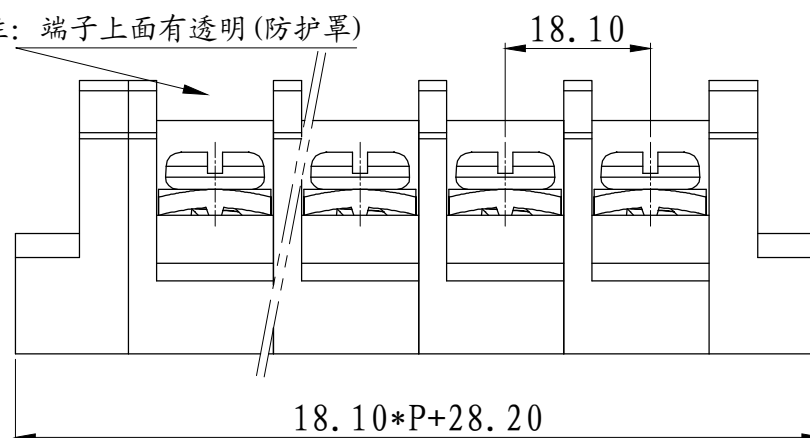

技术要求：
 极数： 组装
 额定电压： 600V
 额定电流： 60A
 螺钉类型/扭力： M6/3.0-6.0
 绝缘材料类型： PC
 阻燃等级： V0
 导线截面： 10mm²

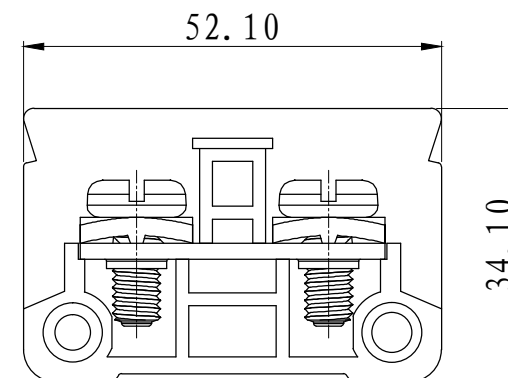

	pitch dimension			Nominal dimension					
variable range	over	over	over	over	over	over	over	over	— ▱ ⤿
	0	6	10	0	30	60	100	150	
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	TR-60防护罩	6039C00010V	1	PC	透明
6	M4螺母	SNM0400010V	2	黄铜	镀镍
5	M4螺杆	L000400010V	2	铁	镀锌
4	JHY1-100螺丝	SSD0600010V	2P	碳钢	镀锌
3	JH9-60导电件	6040B00010V	P	黄铜	镀镍
2	TR-60端板	6039B30XXAV	2	PC	黑色
1	TR-60本体	6039A30XXAV	P	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/09/08	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TR-60XX-130-00A TR-60A-产品