

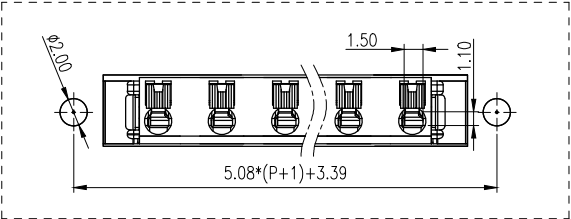




REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

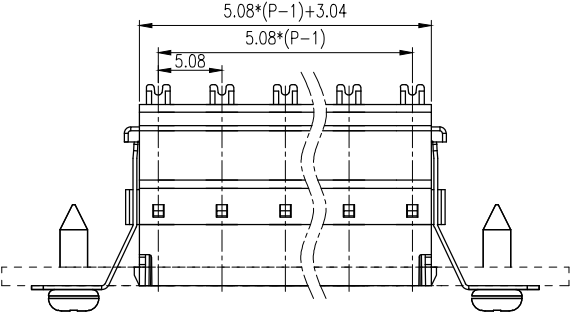

- NOTES:
1. Voltage Rating: 300V, Current Rating: 6A
 2. PITCH: 5.08mm
 3. Insulation Withstands Voltage: AC2000V/min
 4. Insulation Resistance: 2.0 MΩ or more at DC500V
 5. Using Temperature Range: -40℃ ~ +105℃
 6. Suitable Electric Wire: 26-20AWG

- 技术要求:
1. 额定电压: 300V, 额定电流: 6A
 2. 间距: 5.08mm
 3. 耐压值: AC 2000V/min
 4. 绝缘阻抗: 2.0兆欧
 5. 使用条件: -40℃ ~ +105℃
 6. 适用线规: 26-20AWG

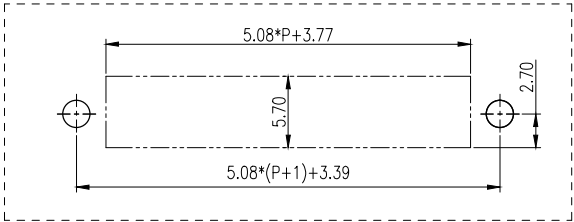

	pitch dimension			Nominal dimension					— ▱ ⌒
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	M2.2*6.5圆头自攻螺丝	SQZSA226509V	2	碳钢	蓝白锌
6	LC80C-2.54穿墙件	1170B0002AV	2	SUS301	
5	LC80针	1170B0001AV	2	磷青铜	镀亮锡
4	LC8-2.54弹片	1169B0002AV	P	不锈钢	
3	LC8按钮	1169D0Y01AV	P	PA66	
2	LZ8X-5.08主体	1200A0YXXAV	1	PA66	
1	LC8XM-5.08主体	1197M0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	24/10/16	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-1172001	REV: V0
TITLE				LC80XC-5.08-XXP-1Y-00A	1 of 1
				LC80XC-5.08-成品	